

ON/OFF switches located near the hose reel or hydrant outlet, at each floor the main FirePump at the underground water tank with a capacity to discharge 900 liters per minute at 3 bar. pressure as measured at the discharge point should be installed.

For the buildings having a height of more than 18 meters the height should not be of less than 100 mm. internal diameter. The riser should be connected to the bottom of the terrace tank with a stop valve and a NRV to act as a Down - corner.

One riser is required for every 1000sq. meters of floor area and if the building is divided into two, or more parts then each part should have a separate riser with all the fittings and valves. Each floor should have one hydrant outlet with a coupling for attaching a 63 mm dia hose & 25 mm bore Hose-reel with 8 mtrs. SS. Shut-off nozzle at each floor landing. The length of the hose reel must be enough to reach the farthest corner of the floor. Hose-box with 15 meters long 63mm dia. hose with 12.5 mm. bore nozzle at alternate floors. The Hose-reel hose should be coupled to the Riser.

Fire-service inlet should be installed at a point near the entry to the premises where a Fire service vehicle can approach easily.

A permanent hydrant coil comprising of 63 mm dia hose 2nos of hydrant valves should be installed at the terrace level.

Underground Reticulating types of fire service inlet should be at the terrace level. The overhead tank shall be of a capacity of not less than 20,000 liters. The Underground tank shall be of not less than 1,00,000 liters.

The Fire-Lift and all the lifts should have a provision to ground automatically in case of electricity failure. Each building should have at least one lift as a Fire-Lift and if the building is divided into two or more parts then each should have a Fire-Lift. Lift-well should have blowers to pressurize the lift-well so connected that it will automatically operate when alarm call point is operate, so that it prevents the lift well getting smoke logged.

Fire alarm call point to be installed at each floor with sounders capable of being heard all throughout the building.

One Carbon Dioxide (CO₂) type extinguisher of 4.5 kg. with ISI mark. and one extinguisher of 5kg Dry Chemical Powder (DCP) type extinguisher with ISI mark to be installed on each floor in case of commercial building.
One Carbon Dioxide (CO₂) type extinguisher of 4.5 kg. with ISI mark. OR Two Carbon Dioxide (CO₂) type extinguisher of 2 kg. with ISI mark capacity on alternate floors in case of residential building.
If the building is divided into two or more parts then each part should have these extinguishers installed.

The staircase has to be open from at least one or two sides but if the staircase is in the centre core of the buildings it has to be pressurized to prevent it from getting smoke to the Floor/Owner's level should be retained in the stair case or close to it to make it easily approachable in case of Fire from the floor below or above.

The basement of 200 sq. meters or more should be protected with Automatic Sprinkler with at least one sprinkler head for actual Car parking space.
Additionally be protected by a Hydrant outlet and two 25 mm. bore Hose-reel hoses with bore nozzles at each basement level.

A lightning arrester should also be installed and be properly earthed to prevent damage to building when the lightning strikes.

8. PHOTO LUMINESCENT (AUTO GLOW) SIGNAGE'S :
If the building falls in a confined area or if it has an enclosed staircase or is not well lit-up on the inside, then adequate photo luminescent (auto glow) signage's

should be displayed on each floor / landing / stairway / dead-end along all exit routes leading to the ground level. The signage should indicate fire fighting, fire safety equipment present on the respective floor/landing/pathway/dead-end and along all exit routes leading to the ground level.

9. ELECTRIC POWER SUPPLY TO THE ENTIRE FIRE-SAFETY SYSTEM

Electricity supply to the fire pump, fire alarm system, staircase pressurization system and fire lift should be made available from the main Electrical supply, (i.e. from Electrical power supply of the company) This is to ensure availability of power supply to the fire protection & Safety system even after the main electrical supply to the building is switched off at the time of fire.

FIRE SEFTY SYSTEM SHOULD BE PROVIDED IN IDIVIDUAL SHOW ROOM BY OWNER

IMPORTANT INSTRUCTIONS:

After inspection of a low-rise building by the fire service authority if the fire officer concerned feels the need for additional fire prevention/protection measures / ventilation system required or equipment (i.e. - Passive system / Suppression system / Fire door - Window / Detonation system / Active system / Quirlkita / Dröcher etc.) as per Fire lead / Fire risk / Public gathering.

Potential / Occupancy / Confined area,

those additional measures / equipment have to be implemented / installed.

LEGEND	DESCRIPTION
	SINGLE HYDRANT SYSTEM PPR MAIN
	FIRE HOSE REEL
	SLUICE VALVE
	TWO WAY SAME CONNECTION
	RISE OR DROP
	NON RETURN VALVE
	REDUCER
	FIRE HOSE BOX
	HOSE REEL HOUSE
	DO P & CO-2

B.A./F.S.I. AREA CALC. ON GR. FL.
(SECURITY CABIN AREA)
1) $1.75 \times 1.50 = 2.63$ SQ. MT.
NET B.A./F.S.I. SECURITY CABIN = 2.63 SQ. MT.
CLAUSE NO- 6.7.3.2 PERMITTED ROAD IN ROAD MARGIN
(ONLY PRE-FAB STRUCTURE)(MAXIMUM 3.00MTR. HT.)

IT IS CERTIFIED THAT PLOT UNDER DISCUSSION IS SURVEYED BY ME AND THE DIMENSIONS OF ALL SIDES OF PLOT AND PLOT AREA AS SHOWN IN PLAN AREA MEASURED BY ENGINEER ARE TRUE AND IN ACCORDANCE WITH OWNER'S PROVISION RECORD.

THE DEPTH AND POSITION OF EXISTING MAINWATER MANHOLE IS VERIFIED. NO ONE INCHER AND PERMISES CAN GET DRAINAGE CONNECTION.

IT IS CERTIFY THAT REGARDING TO C.G.C.D.R.-107 ALL REQUIREMENT OF THE BUILDING ARE CHECKED AND NECESSARY ACTION ARE TAKEN.

IT IS CERTIFY THAT REGARDING TO C.G.C.D.R.-108 4.4.3 OF THE C.G.C.D.R.-2017

THE STRUCTURE OF THE BUILDING IS DESIGN AS PER THE NORMS OF THE INDIAN STANDARD DESIGN OF STAIRCASE AND RAILING IS PROVIDED AS PER PROVISION OF THE CLAUSE NO. 13.11.1 AND 13.11.3 OF C.G.C.D.R.-2017.

PEDSTETHINGS RAMP IS PROVIDED AS PER THE PROVISION OF THE CLAUSE NO. 13.14.14 OF C.G.C.D.R.-2017.

LIFT IS PROVIDED AS PER THE PROVISION OF THE CLAUSE NO. 13.12 AND OF C.G.C.D.R.-2017

WATER BOX IS PROVIDED AS PER THE PROVISION OF THE CLAUSE NO. 13.6 OF C.G.C.D.R.-2017

LETTER BOX FOR MAIL SHALL BE PROVIDED AT GROUND LEVEL FOR EACH UNIT.

WATER TANK FOR FIRE SAFETY REQUIREMENT PROVIDED AS PER FIRE PREVENTION AND FIRE SAFETY ACT-2018.

ELECTRICAL INFRASTRUCTURE SHALL BE PROVIDED AS PER CLAUSE NO.13.11 OF C.G.C.D.R.-2017

DINKING WATER FACILITY IS PROVIDED AS PER CLAUSE NO. 13.15 OF C.G.C.D.R.-2017

DISPOSAL FACILITY IS PROVIDED AS PER THE CLAUSE NO. 13.16 OF C.G.C.D.R.-2017

SIGNAGES OF THE PARKING PLACE IS NOT BE PROVIDED AS PER THE PROVISION THE CLAUSE NO. 13.17 OF THE C.G.C.D.R.-2017

ENTRANCE OF THE BUILDING IS PROVIDED AS PER CLAUSE NO. 13.18 OF C.G.C.D.R.-2017

THE PAVING OF BUILDING UTINFLAT, PLOT AS PER THE PROVISION OF THE CLAUSE NO. 13.13 OF C.G.C.D.R.-2017

THE STRUCTURE DESIGN OF BUILDING IS AS PER NORMS OF THE SPECIFICATION IN THE INDIAN STANDROD AND NECESSARY ACTION CAN BE TAKEN FOR THE STRUCTURAL SAFETY DURING CONSTRUCTION.

RAIN WATER STORAGE TANK AND RAIN WATER HARVESTING SYSTEM SHALL BE PROVIDED AS PER THE CLAUSE NO. 17.2 OF C.G.C.D.R.-2017

COMMUNITY BEN PROVIDED AS PER THE PROVISION OF THE CLAUSE NO.17.2A & 17.25 OF C.G.C.D.R.-2017

GREY WATER RECYCLING SYSTEM & DUAL PLUMBING SYSTEM IS PROVIDED AS PER THE CLAUSE NO. 17.3 OF C.G.C.D.R.-2017.

TREE PLANTATION IS PROVIDED AS PER CLAUSE NO.17.4 OF C.G.C.D.R.-2017

SOLAR ASSISTED WATER HEATING SYSTEM SHALL BE PROVIDED AS PER CLAUSE NO.17.5 OF C.G.C.D.R.-2017.

POLLUTION CONTROL SYSTEM IS PROVIDED AS PER THE CHAPTER NO. -18 OF C.G.C.D.R.-2017

FIRE SAFETY SYSTEM IS PROVIDED AS PER CHAPTER NO. -14 OF C.G.C.D.R.-2017

THE SAFETY PROVISION SHALL BE MADE AS PER FIRE PREVENTION AND LIFE SAFETY MEASURES REGULATION 2013 AND FIRE PREVENTION AND LIFE SAFETY MEASURES REGULATION -2013.

MAINTNANCE AND UPGRADEMENT OF BUILDING IS AS PER CHAPTER NO. 19 OF C.G.C.D.R.-2017

MARGINAL SPACE A BASEMENT SLL SHALL HAVE LOAD BEARING CAPACITY OF 4500 TONNES PER SQUARE METRE AND SHALL BE PROVIDED AS PER CLAUSE NO. 14 OF C.G.C.D.R.-2017.

FIRE PREVENTION AND FIRE SAFETY ACT-2018.


ROOF TOP SOLAR ENERGY INSTALLATION A GENERATION SHALL BE PROVIDED AS PER CLAUSE NO.17.51 OF C.G.C.D.R.-2017.

THE GLAZED SURFACE AREA OF THE EXTERNAL FACADE SHALL BE NOT REFLACTIVE AND SHOULD UP TO MINIMUM 10% OF TOTAL SURFACE AREA OF EACH FACADE WITH THE PROVISION OF SAFETY RAILING UP TO SIL LEVELS AS PER CLAUSE NO.13.3, OF C.G.C.D.R.-2017.

1	PLOT AREA	3189.65
2	PERMISSIBLE FSI	5741.37
3	PERMISSIBLE CHARGEABLE FSI	2870.69
4	MAX. PERMISSIBLE F.S.I. (2+3)	8612.06
5	TOTAL UTILISED F.S.I	8612.02
6	UTILISED CHARGEABLE F.S.I. (5-2)	2870.65
7	MAX. PERMISSIBLE F.S.I. COMMERCIAL	861.20

BLOCK	CONSUME F.S.I.			No. Of Com. Unit	RESIDENTIAL Dwelling Unit Up to 50 sq.mt			RESIDENTIAL Dwelling Unit more than 50 sq.mt and up to 66 sq.mt			Dwelling Unit more than 66 sq.mt and up to 90 sq.mt			OTHER F.S.I.	
	COMM/ OTHER	RESI	TOTAL		No. Of Unit	F.S.I. AREA	% USED F.S.I.	No. Of Unit	F.S.I. AREA	% OF F.S.I.	No. Of Unit	F.S.I. AREA	% OF F.S.I.	F.S.I.	% OF F.S.I.
A	76.88	4458.50	4475.38	0	0	0.00	0.00	0	0.00	0.00	0	0.00	0.00	0.00	0.00
B	12.88	1473.76	1436.64	0	0	0.00	0.00	12	749.78	18.11	45	3374.48	81.58	12.88	0.31
TOTAL	29.76	8582.26	8612.02	0	0	0.00	0.00	12	749.78	18.11	96	7832.98	90.95	27.76	0.35

GRAND TOTAL DETAIL					
Sr. No.	Dwelling Unit Type	No. OF Unit	Used F.S.I.	% USED F.S.I.	Chargeble F.S.I.
A	COMMERCIAL UNIT	0	0.00	0.00	0.00
	Up 50 sq.mt	0	0.00	0.00	0.00
	more then 50 and up to 66	12	749.28	8.70	249.75
	more then 66 and up to 90	96	7832.98	90.95	2610.85
	E with A/F F.S.I. (40% slab)	0	29.76	0.35	10.05
	Grand Total	108	8612.02	100.00	2870.65

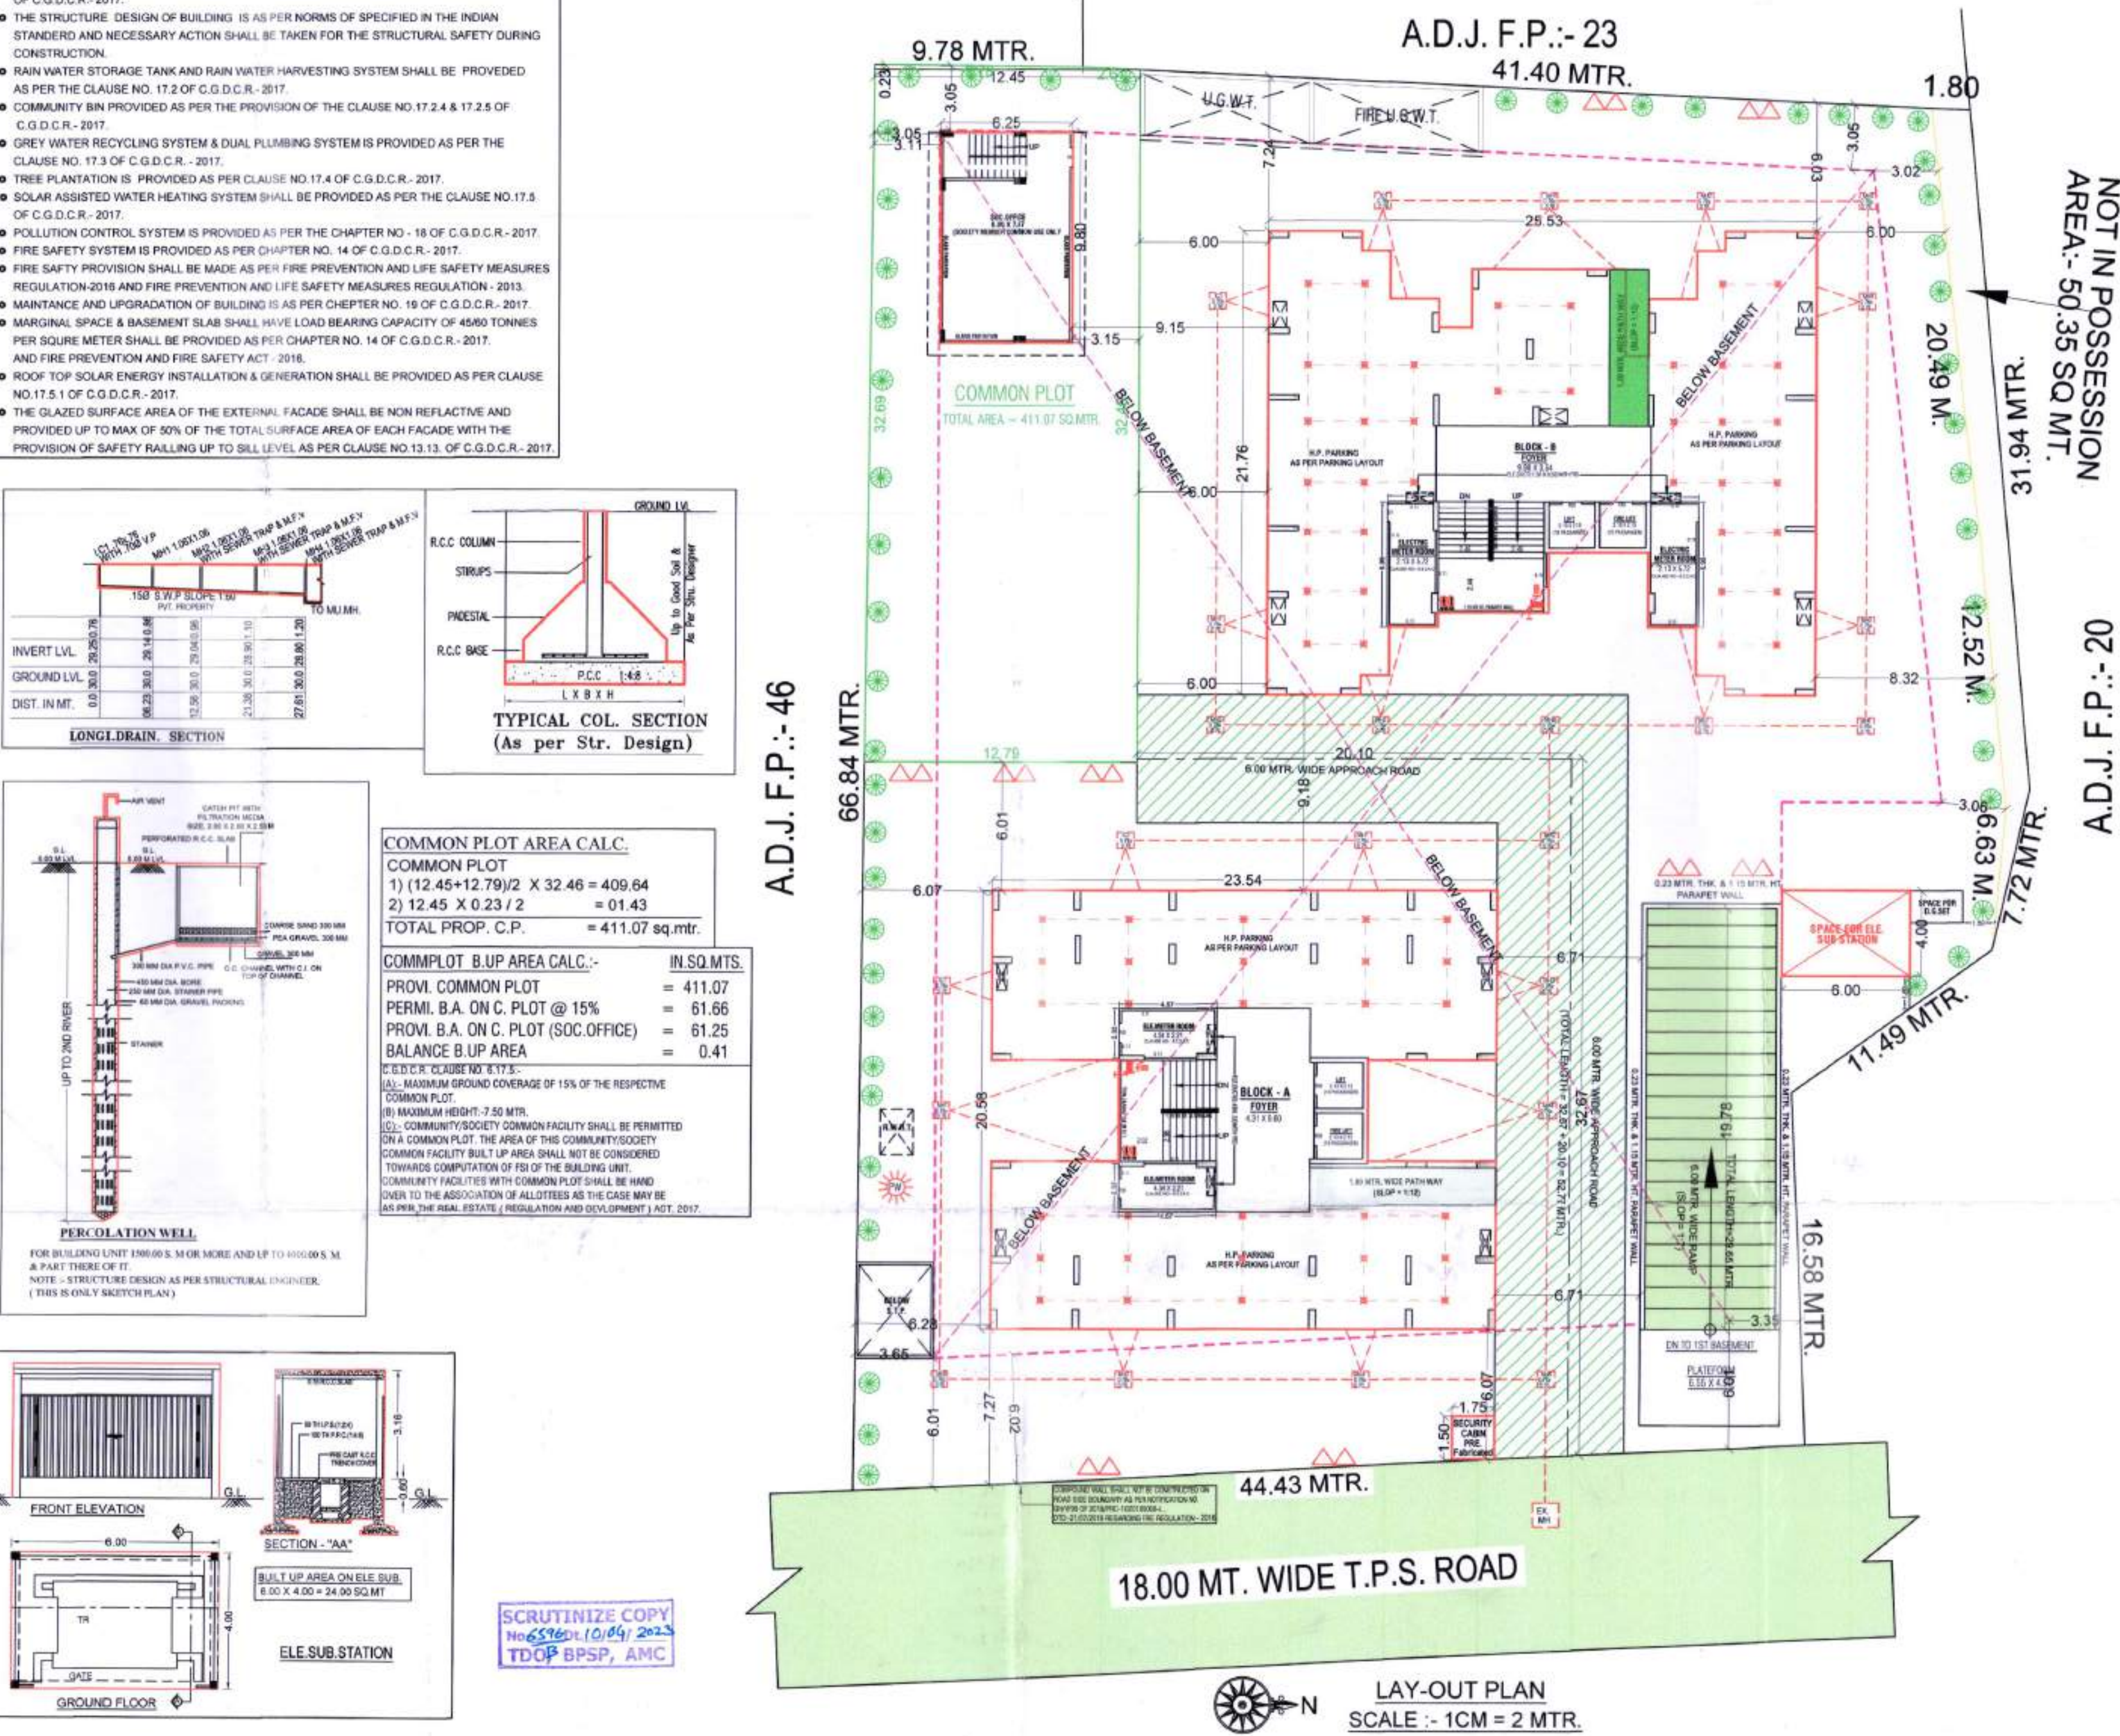

TREE PLANTATION
PLOT AREA = 3240.00 sq.mtr.
REQ. = 200 SQM. PLOT AREA = 5 TREE
 $3240.00 / 200 \times 5 = 81$ TREE REQ.
SAY 81 NOS
PROVIDED 90 NO. TREE

PERCOLATING WELL CAL.
PLOT AREA F.P. NO:-24+28 = 3240.00 sq.mtr
REQ. = 1500 TO 4000 SQ. MTS. = 1 WELL
 $3240.00 / 4000 = 0.81$
0.81 SAY 1 NOS OF PERCOLATING WELL
PROVIDED = 1 NOS OF PERCOLATING WELL


CONTAINER BIN CALCULATION(RESI.
TOTAL NOS OF UNIT = 108 NOS
RESI. 1 UNIT 10 LIT. REQ. 1 CONTAINER
TOTAL UNIT 108 X 10 LIT. = 1080 LIT.
1 CONT (80 LTRS CAP.)= 1080 / 80 LIT. = 13.50
= 13.50 NOS SAY 14 CONTAINER REQUIRED
TOTAL REQ. 14 NOS RESI.
TOTAL PROVIDED. = 15 NOS.

BLOCK	R.C.C BEAM	SECURITY CABIN	TOTAL
A	14.25	02.63	16.88
B	12.88	00.00	12.88

BUILT UP AREA TABLE			
	TOTAL		
FLOOR	BLOCK-A	BLOCK-B	TOTAL
BASEMENT	2358.78	---	2358.78
GR. FLOOR	427.69	445.27	873.96
1st. FLOOR	427.69	445.27	873.96
2nd. FLOOR	427.69	445.27	873.96
3rd. FLOOR	427.69	445.27	873.96
4th. FLOOR	427.69	445.27	873.96
5th. FLOOR	427.69	445.27	873.96
6th. FLOOR	427.69	445.27	873.96
7th. FLOOR	427.69	445.27	873.96
8th. FLOOR	427.69	445.27	873.96
9th. FLOOR	427.69	445.27	873.96
10th. FLOOR	427.69	445.27	873.96
11th. FLOOR	427.69	445.27	873.96
12th. FLOOR	427.69	299.92	727.61
13th. FLOOR	250.42	---	250.42
STAIR CABIN	061.17	092.85	154.02
O.H.W.T. + L.M.R.	048.45	71.31	119.76
SECURITY CABIN	02.63	---	02.63
E.L.E. SUB STATION	24.00	---	24.00
SOC.OFFICE(GR. + F.F)	122.50	---	122.50
TOTAL	8427.92	5819.32	14247.24

F.S.I. & FLOOR AREA TABLE			
		TOTAL	
FLOOR	BLOCK-A	BLOCK-B	TOTAL
GR. FLOOR (S.C)	002-3	-----	002.63
1st. FLOOR	357.80	356.91	714.71
2nd. FLOOR	357.80	356.91	714.71
3rd. FLOOR	357.80	356.91	714.71
4th. FLOOR	357.80	356.91	714.71
5th. FLOOR	357.80	356.91	714.71
6th. FLOOR	357.80	356.91	714.71
7th. FLOOR	357.80	356.91	714.71
8th. FLOOR	357.80	356.91	714.71
9th. FLOOR	357.80	356.91	714.71
10th. FLOOR	357.80	356.91	714.71
11th. FLOOR	357.80	356.91	714.71
12th. FLOOR	357.80	210.63	568.43
13th. FLOOR	179.15		179.15
TOTAL	4475.38	4136.64	8612.02

USE / UNIT TABLE					
TOTAL					
FLOOR	BLOCK-A	BLOCK-B	USE	TOTAL	
GR. FLOOR (HP)			PARKING		
1st. FLOOR	04	05	RESI.	09	
2nd. FLOOR	04	05	RESI.	09	
3rd. FLOOR	04	05	RESI.	09	
4th. FLOOR	04	05	RESI.	09	
5th. FLOOR	04	05	RESI.	09	
6th. FLOOR	04	05	RESI.	09	
7th. FLOOR	04	05	RESI.	09	
8th. FLOOR	04	05	RESI.	09	
9th. FLOOR	04	05	RESI.	09	
10th. FLOOR	04	05	RESI.	09	
11th. FLOOR	04	05	RESI.	09	
12th. FLOOR	04	03	RESI.	07	
13th. FLOOR	02		RESI.	02	
TOTAL	50	58	RESI.	108	

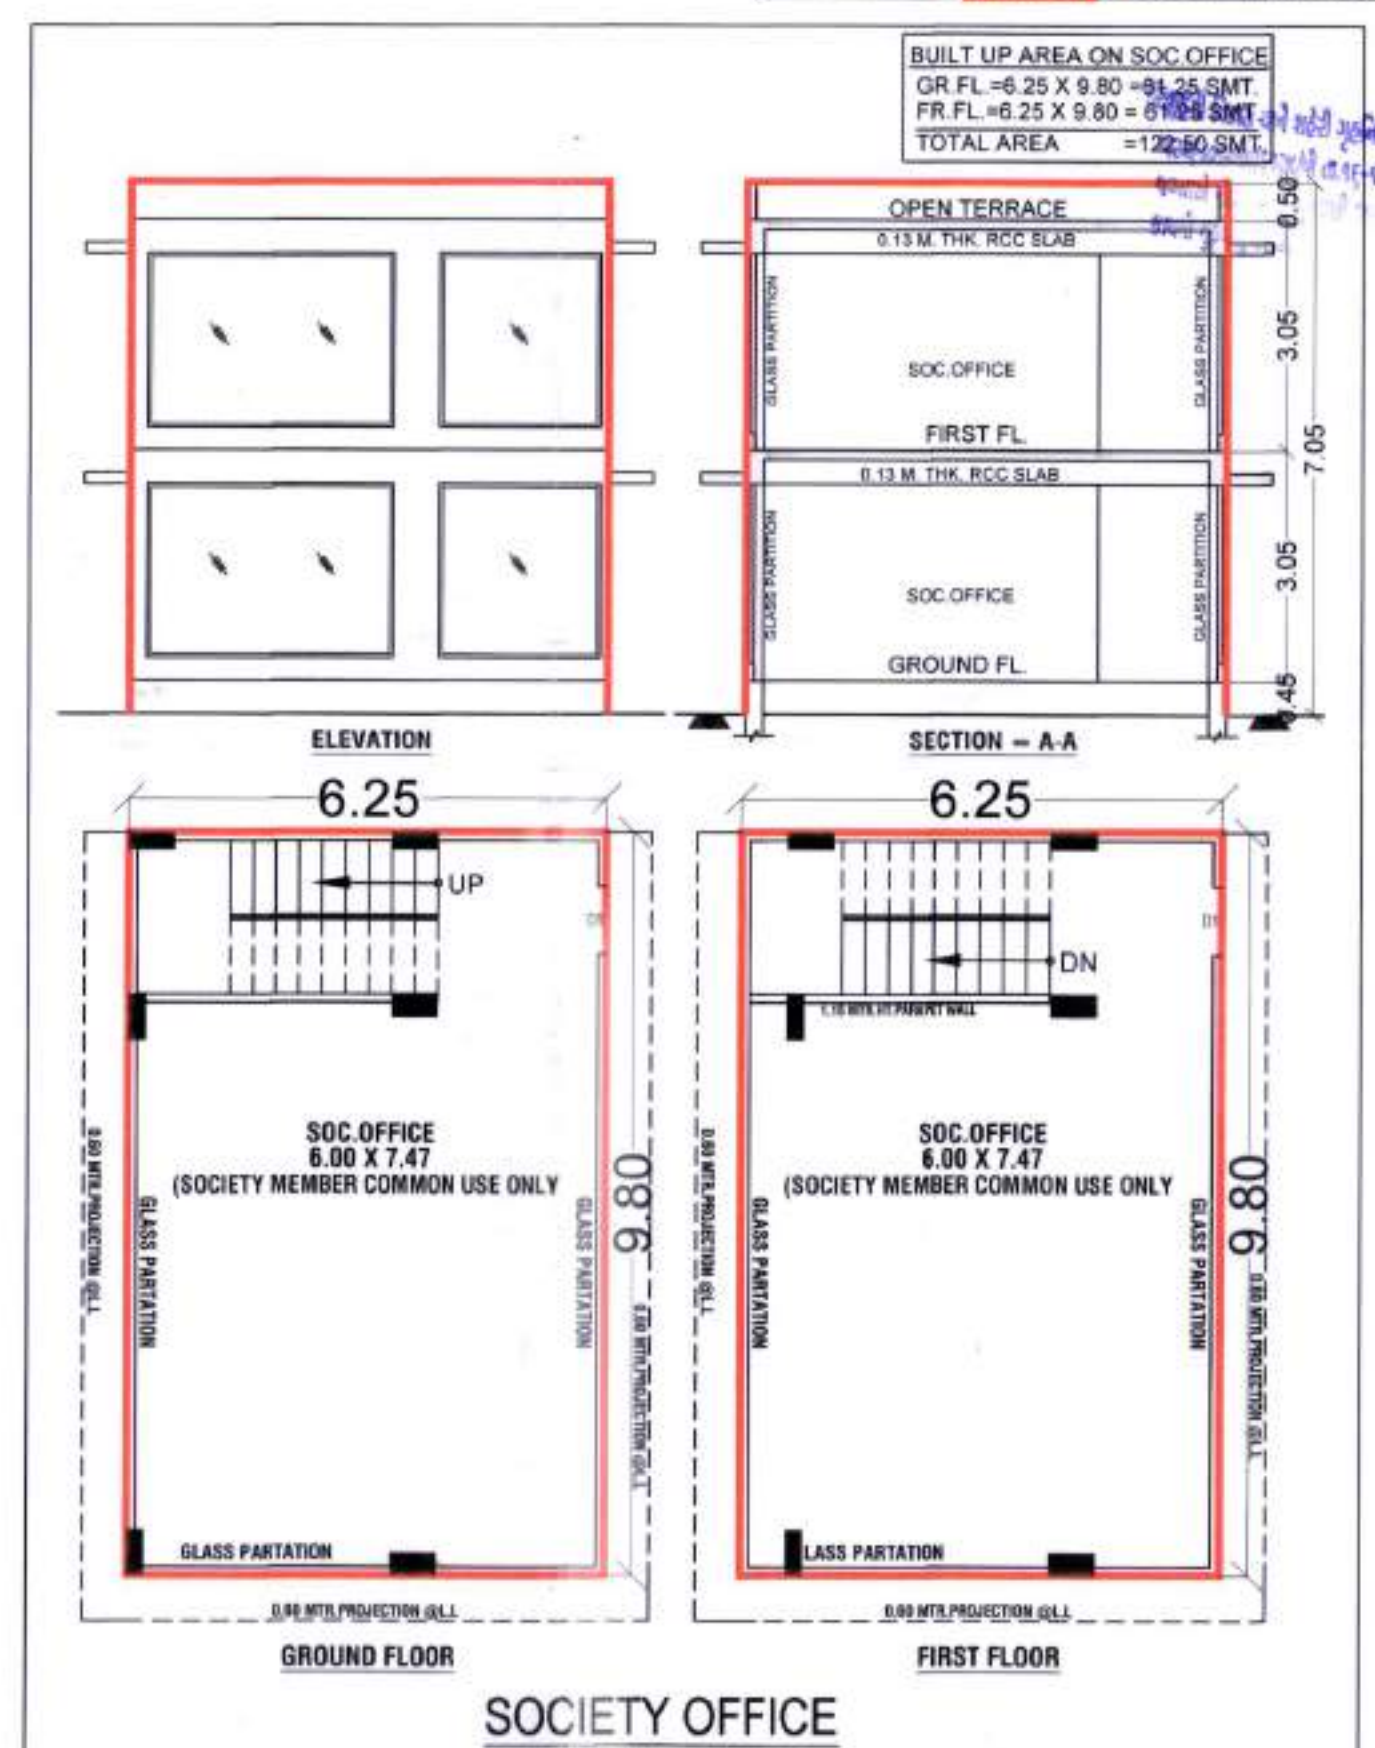[illegible]

RESIDENTIAL AFFORDABLE HOUSING PROJECT(RAH)	
LAY-OUT PLAN	SHEET NO = 1/5
PLAN SHOWING PROPOSE RESIDENTIAL (RESIDENTIAL AFFORDABLE HOUSING) BUILDING ON AMALGAMATED F.P.NO.-24 + 26 OF T.P.S.NO.- 93/C (GYASPUR - VEJALPUR) (DRAFT SANCTIONED),(R.S.NO.-247/B/2/1,247/B/2/2,247/B/4/1,247/B/4/2),(O.P.NO.-24/1,24/2,26/1,26/2),MOJE:-GYASPUR,TALUKA:-VATVA, DIST.-AHMEDABAD.	
ZONE- R1	USE:- RESIDENCE(RAH)(DW-3)
SCALE -1:1 CM=2 MT	BLOCK - A
AREA TABLE	SQ. MTS.
PLOT AREA	3240.00
NOT IN POSSESSION	50.35
NET PLOT AREA FOR DEVELOPMENT	3189.65
REQ. COMMON PLOT AREA @ 10% OF (3240.00)	324.00
PROVIDED COMMON PLOT AREA	411.07
PERMI. BASE F.S.I. AREA 1:1.8 (3189.65 X 1.8)	5741.37
PERMI. CHARGEABLE F.S.I. @ 0.9 (3189.65 X 0.9)	2870.69
TOTAL PERM. F.S.I. @ 2.7 (3189.65 X 2.7)	8612.06
TOTAL UTILIZED F.S.I. AREA	8612.02
UTILIZED CHARGEABLE FSI USE (8612.02 - 5741.37)	2870.65
BALANCE F.S.I. AREA (8612.06 - 8612.02)	00.04

COLOR NOTE

	<u>PLOT BOUNDARY</u>		<u>PERCOLATION WELL</u>
	<u>PROPOSED WORK</u>		<u>COMMUNITY BIN</u>
	<u>ROAD</u>		<u>TREE</u>
	<u>DRAINAGE</u>		<u>NOT IN POSSESSION</u>

① મી. યશવંતી. મોડગલ ② મી. ડોર ③ સરેન્દ્રીય. મી. મોડગલ. ④ રા. મલિય ⑤ F.Z. Mamsuri OWNER: F. T. Mamsuri	Utsav Patel 89, Riddhi Society Ghatlodia, Ahmedabad-380061 DEVELOPER Lic No: DEV1271310324 DEVELOPERS
---	--

<i>S. B. Multani</i> SAMIR B. MULTANI AMC. AR. LIC. NO. 001AR03092700256 BLOCK NO. D, F.NO. 302, LAXURIYA-1, NR. EMKAD 100 FT. ROAD, SARKHEJ, AHMEDABAD-380055	<i>A. J. Parikh</i> ACHAL J. PARIKH 606/07/08 SUN SQUARE, NR. REGENT, ANANTARIM HOTEL, NAVRANGPURA, AHMEDABAD-9 AINC LIC. NO. SD 0015E25062800093
ENGINEER	STRUCTURAL ENGINEER
<i>ABD</i> ALL-ODDIN R. DHUKA (B.E. CIVIL) AINC. CE. LIC. NO. AHMEDABAD (RWA)-1 B-304, SKY AVENUE, NR. KADRI PARTY PLOT, AMBER TOWER, SARKHEJ, AHMEDABAD-88	<i>Atarshi</i> AKASH KOSHANKUMAR PATEL LIC. NO. 901SR19032811741 CHARSHERI LALMANDIR PASE, DHOLKA - 387810
COW	SOR

[illegible]

NOTES REALETED TO FIRE SAFETY:-

ON/OFF switches located near the hose reel hose or hydrant outlet, at each floor the main FirePump at the underground water tank with a capacity to discharge 900 litres per minute at 3 bar. pressure as measured at the terrace level should be installed.

The Riser for the buildings exceeding 18 meters and above 18 meters height should not be of less than 100 mm. internal diameter. The riser should be connected to the bottom of the terrace tank with a stop valve and a MVR to act as a Down - corner.

One riser is required for every 1000sq. meters floor area and if the building is divided into two or more parts then each part should have a separate riser with all the fittings at each level. Each floor should have one hydrant outlet with a coupling for attaching a 63 mm dia hose & 25 mm bore hose-reel hose with 8 mm. S.S. Shut off nozzle at each floor landing. The length of the hose reel hose should be enough to reach the furthest corner of the floor. Hose box with 15 meters long 63mm. dia. hose and 12.5 mm. bore nozzle at alternate floors. The Hose-reel hose should be coupled to the Riser.

Fire-service inlet should be installed at a point near the entry to the premises where a Fire service vehicle can approach easily.

A permanent hydrant point comprising of 63 mm dia size 2 nos of hydrant valves should be installed at the terrace level.

Overhead tank Refilling bypass connection should be done at the terrace level. The overhead tank shall be of a capacity of not less than 20,000 litres. The Underground tank shall be of not less than 1,00,000 litres.

2. FIRE LIFT:

The Fire-Lift and all the lifts should have a provision to ground automatically in case of electricity failure. Each building should have at least one lift as a Fire-Lift and the building is divided into two or more parts then each should have a Fire-Lift. Lift well should have blowers to pressurize the lift well as connected that it will automatically operate when alarm call point is operate, so that it prevents the lift well getting smoke logged.

3. FIRE ALARM:

Fire alarm call point to be installed at each floor with sounders capable of being heard all throughout the building.

4. FIRE EXTINGUISHERS

One Carbon Dioxide (CO2) type extinguisher of 4.5 kg. with ISI mark, and one extinguisher of 5kg. Dry Chemical Powder (DCP) type extinguisher with ISI mark to be installed on each floor in case of commercial building.

One Carbon Dioxide (CO2) type extinguisher of 4.5 kg. with ISI mark, OR Two Carbon Dioxide (CO2) type extinguisher of 2 kg. with ISI mark capacity on alternate floors in case of residential building.

If the building is divided into two or more parts then each part should have these extinguishers installed.

5. STAIRCASE:

The staircase has to be open from at least one or two sides but if the staircase is in the centre core of the buildings it has to be pressurized to prevent it from getting smoke logged. The Riser-Down-corner should be located in the staircase or close to it in make it easily approachable in case of Fire from the floor below or above.

6. BASEMENT:

The basement of 200 sq. meters or more should be protected with Automatic Sprinkler system with at least one sprinkler head for actual floor parking space.

Additionally be protected by a Hydrant outlet and two 25 mm. bore Hose-reel hoses with 8 mm. bore nozzles at each basement level.

7. LIGHTNING ARRESTER:

A lightning arrester should also be installed and be properly earthed to prevent damage to the building when the lightning strikes.

8. PHOTO LUMINESCENT (AUTO GLOW) SIGNAGES:

If the building falls in a confined area or if it has an enclosed staircase or is not well lit-up on the inside, then adequate photo luminescent (Auto glow) signages should be displayed at each floor / landing / pathway / dead-end along all exit routes leading to the ground level. The signages should indicate fire fighting, fire safety equipment present on the respective floor/landing/pathway/dead-end and along all exit routes leading to the ground level.

9. ELECTRIC POWER SUPPLY TO THE ENTIRE FIRE-SAFETY SYSTEM

Electricity supply to the fire pump, fire alarm system, staircase pressurization system and fire lift should be made available from the main Electrical supply (i.e. from Electrical power supply of the company) This is to ensure availability of power supply to the fire protection & Safety system even after the main electrical supply to the building is switched off at the time of fire.

10. INDIVIDUAL FIRE SAFETY SYSTEM

FIRE SAFETY SYSTEM SHOULD BE PROVIDED IN INDIVIDUAL SHOW ROOM BY OWNER

IMPORTANT INSTRUCTIONS:

After inspection of a low-rise building by the fire service authority, if the fire officer concerned feels it need for additional fire prevention/protection measures / ventilation system required or equipment (i.e. - Passive system / Suppression system / Fire alarm - Window / Detection system / Active system / Sprinkler / Drencher etc.) as per fire load / Fire risk / Public gathering.

Potential / Occupancy / Confined area, those additional measures / equipment have to be implemented / installed.

LEGEND





DESCRIPTION	DESCRIPTION
	FIRE HYDRANT SYSTEM PPR MAIN
	SINGLE HANDED HYDRANT VALVE
	SLUICE VALVE
	TWO WAY SAME CONNECTION
	RISE OR DROP
	NON RETURN VALVE
	REDUCER
	FIRE HOSE BOX
	HOSE REEL HOUSE
	DOP CO2

B.A./F.S.I. AREA CALC. ON GR. FL. (SECURITY CABIN AREA)

1) 1.75 X 1.50 = 2.63 SQ. MT.
NET B.A./F.S.I. SECURITY CABIN = 2.63 SQ. MT.
CLAUSE NO - 6.7.3.2 PERMITTED ROAD IN ROAD MARGIN (ONLY PRE-FAB STRUCTURE) (MAXIMUM 3.00 MTR. HT.)

NOTES REALETED TO C.G.D.C.R.V. - 2017:-


- IT IS CERTIFIED THAT PLOT UNDER REFERENCE IS SURVEYED BY ME AND THE DIMENSIONS OF ALL SIDES OF PLOT AND PLOT AREA AS SHOWN IN PLAN AREA MEASURED BY ENGINEER ON RECORD AND IN ACCORDANCE WITH OWNERSHIP/REVENUE RECORD.
- ENGINEER IS FULLY RESPONSIBLE FOR LEAVING OPEN SPACE AND MARGIN.
- THE DEPTH AND POSITION OF EXISTING MUNICIPAL MAINWELL IS VERIFIED ME ON SITE AND PERMITS CAN GET DRAINAGE CONNECTION.
- IT IS CERTIFY THAT ACCORDING TO C.G.D.C.R. - 2017 ALL REQUIREMENT OF THE BUILDING ARE CHECKED AND NECESSARY ACTION ARE TAKEN.
- IT IS CERTIFY THAT ACCORDING TO THE CLAUSE NO. 4.4.3 OF THE C.G.D.C.R. - 2017, THE STRUCTURE OF THE BUILDING IS DESIGN AS PER THE NORMS OF THE INDIAN STANDARDS.
- DESIGN OF STAIRCASE AND RAILING IS PROVIDED AS PER PROVISION OF THE CLAUSE NO. 13.1.11 AND 13.1.13 OF C.G.D.C.R. - 2017.
- PEDESTRIAN RAMP IS PROVIDED AS PER THE PROVISION OF THE CLAUSE NO. 13.1.14 OF C.G.D.C.R. - 2017.
- LIFT IS PROVIDED AS PER THE PROVISION OF THE CLAUSE NO. 13.12 AND 13.12 OF C.G.D.C.R. - 2017.
- WATER TANK IS PROVIDED AS PER THE PROVISION OF THE CLAUSE NO. 13.6 OF C.G.D.C.R. - 2017.
- LETTER BOX FOR SHALL BE PROVIDED AT GROUND LEVEL FOR EACH UNIT.
- WATER TANK FOR FIRE SAFETY REQUIREMENT PROVIDED AS PER FIRE PREVENTION AND FIRE SAFETY ACT-2016.
- ELECTRICAL INFRASTRUCTURE SHALL BE PROVIDED AS PER CLAUSE NO. 13.11 OF C.G.D.C.R. - 2017.
- DRINKING WATER FACILITY FOR DISABLED PERSONS IS PROVIDED AS PER THE CLAUSE NO. 13.2.2 OF C.G.D.C.R. - 2017.
- DRAINAGE FACILITY IS PROVIDED AS PER THE CLAUSE NO. 13.10 OF C.G.D.C.R. - 2017.
- SIGNAGES OF THE PARKING PLACE IS TO BE PROVIDED AS PER THE PROVISION OF THE CLAUSE NO. 13.7 OF THE C.G.D.C.R. - 2017.
- ENTRANCE OF THE BUILDING IS PROVIDED AS PER CLAUSE NO. 13.1.6 OF C.G.D.C.R. - 2017.
- THE PAVING OF BUILDING UNITS/PLANT PLOT AS PER THE PROVISION OF THE CLAUSE NO. 13.1.3 OF C.G.D.C.R. - 2017.
- THE STRUCTURE DESIGN OF BUILDING IS AS PER NORMS OF SPECIFIED IN THE INDIAN STANDARD AND NECESSARY ACTION SHALL BE TAKEN FOR THE STRUCTURAL SAFETY DURING CONSTRUCTION.
- RAIN WATER STORAGE TANK AND RAIN WATER HARVESTING SYSTEM SHALL BE PROVIDED AS PER THE CLAUSE NO. 17.2 OF C.G.D.C.R. - 2017.
- COMMUNITY BIN PROVIDED AS PER THE PROVISION OF THE CLAUSE NO. 17.2.4 & 17.2.5 OF C.G.D.C.R. - 2017.
- GRAY WATER RECYCLING SYSTEM & DUAL PLUMBING SYSTEM IS PROVIDED AS PER THE CLAUSE NO. 17.3 OF C.G.D.C.R. - 2017.
- SOLAR ASSISTED WATER HEATING SYSTEM SHALL BE PROVIDED AS PER THE CLAUSE NO. 17.5 OF C.G.D.C.R. - 2017.
- POLLUTION CONTROL SYSTEM IS PROVIDED AS PER CHAPTER NO. - 18 OF C.G.D.C.R. - 2017.
- FIRE SAFETY PROVISION SHALL BE MADE AS PER FIRE PREVENTION AND LIFE SAFETY MEASURES REGULATION-2016 AND FIRE PREVENTION AND LIFE SAFETY MEASURES REGULATION - 2012.
- MAINTENANCE AND UPGRADATION OF BUILDING IS AS PER CHAPTER NO. 19 OF C.G.D.C.R. - 2017.
- MARGINAL SPACE & BASEMENT SLAB SHALL HAVE LOAD BEARING CAPACITY OF 4500 TONNES PER SQUARE METER SHALL BE PROVIDED AS PER CHAPTER NO. 14 OF C.G.D.C.R. - 2017.
- ROOF TOP SOLAR ENERGY INSTALLATION & GENERATION SHALL BE PROVIDED AS PER CLAUSE NO. 17.5.1 OF C.G.D.C.R. - 2017.
- THE GLAZED SURFACE AREA OF THE EXTERNAL FACADE SHALL BE NON REFLECTIVE AND PROVIDED UP TO MAX 80% OF THE TOTAL SURFACE AREA OF EACH FACADE WITH THE PROVISION OF SAFETY RAILING UP TO BILL LEVEL AS PER CLAUSE NO. 13.15 OF C.G.D.C.R. - 2017.

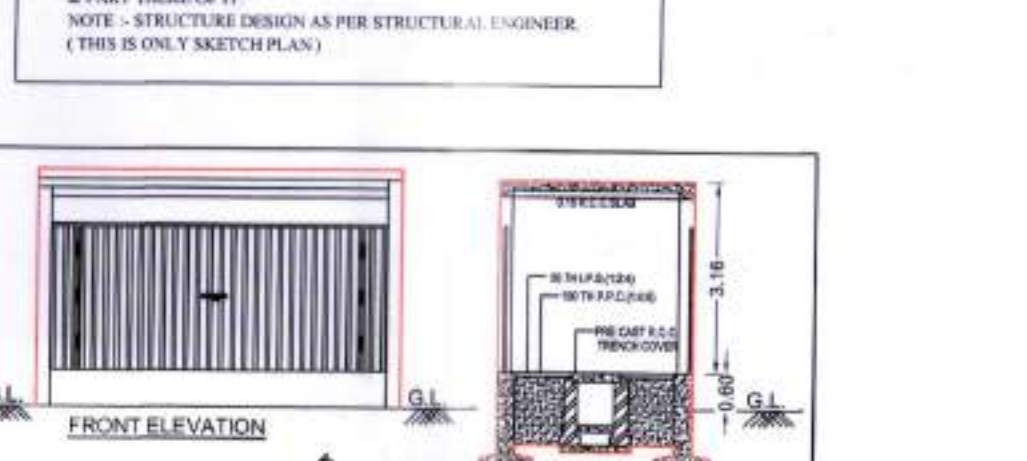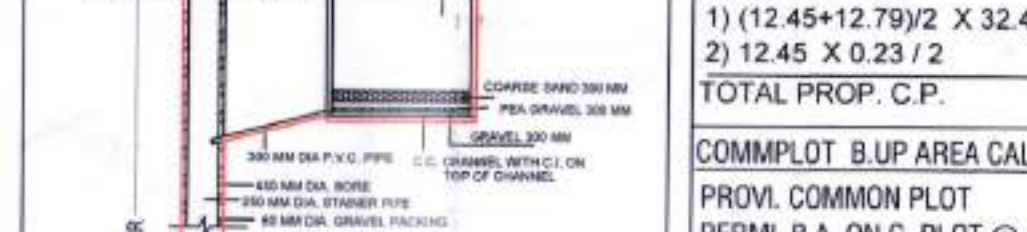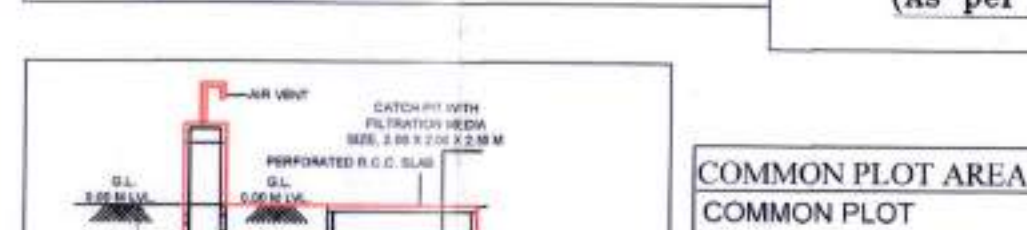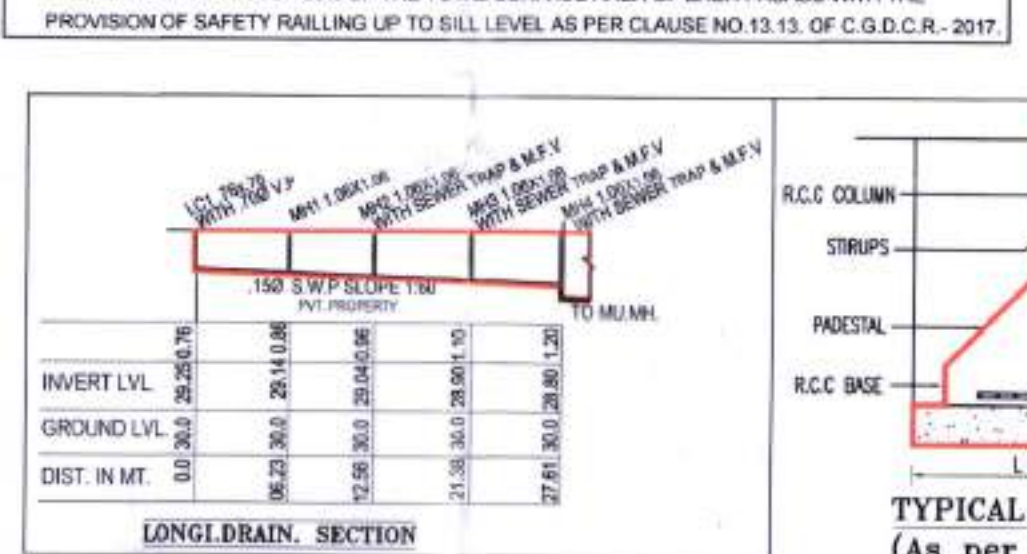

NOT-RESIDENTIAL AFFORDABLE HOUSING PROJECT AREA TABLE

1	PLOT AREA	3199.65
2	PERMISSIBLE FSI	5741.37
3	PERMISSIBLE CHARGEABLE FSI	2870.69
4	MAX. PERMISSIBLE F.S.I. (2+3)	8612.06
5	TOTAL UTILISED F.S.I.	8612.02
6	UTILISED CHARGEABLE F.S.I. (5-2)	2870.65
7	MAX. PERMISSIBLE F.S.I. COMMERCIAL	8612.20

CONSUME F.S.I.			No. Of Com. Unit	RESIDENTIAL Dwelling Unit up to 50 sq.mt			RESIDENTIAL Dwelling Unit more than 50 sq.mt and up to 66 sq.mt			Dwelling Unit more than 66 sq.mt and up to 90 sq.mt			OTHER F.S.I.		
COMM / OTHER	RESI	TOTAL		No. Of Unit	F.S.I. AREA	% USED F.S.I.	No. Of Unit	F.S.I. AREA	% OF USED F.S.I.	No. Of Unit	F.S.I. AREA	% OF USED F.S.I.	USED F.S.I.	% OF USED F.S.I.	
15.88	4458.50	4473.38	0	0.00	0.00	12	749.28	8.70	96	7832.98	90.95	29.76	0.35		
12.88	4123.76	4136.64	0	0.00	0.00	12	749.28	8.70	96	7832.98	90.95	29.76	0.35		
29.76	5882.26	8612.02	0	0.00	0.00	12	749.28	8.70	96	7832.98	90.95	29.76	0.35		
GRAND TOTAL DETAIL															
Dwelling Unit Type			No. Of Unit	F.S.I. AREA	% USED F.S.I.	Chargeable F.S.I.									
COMMERCIAL UNIT			0	0.00	0.00	F.S.I.									
Up to 50 sq.mt			0	0.00	0.00	F.S.I.									
more than 50 and up to 66			12	749.28	8.70	249.75									
more than 66 and up to 90			96	7832.98	90.95	2610.85									
With ART F.S.I. (40% slab)			0	29.76	0.35	10.05									

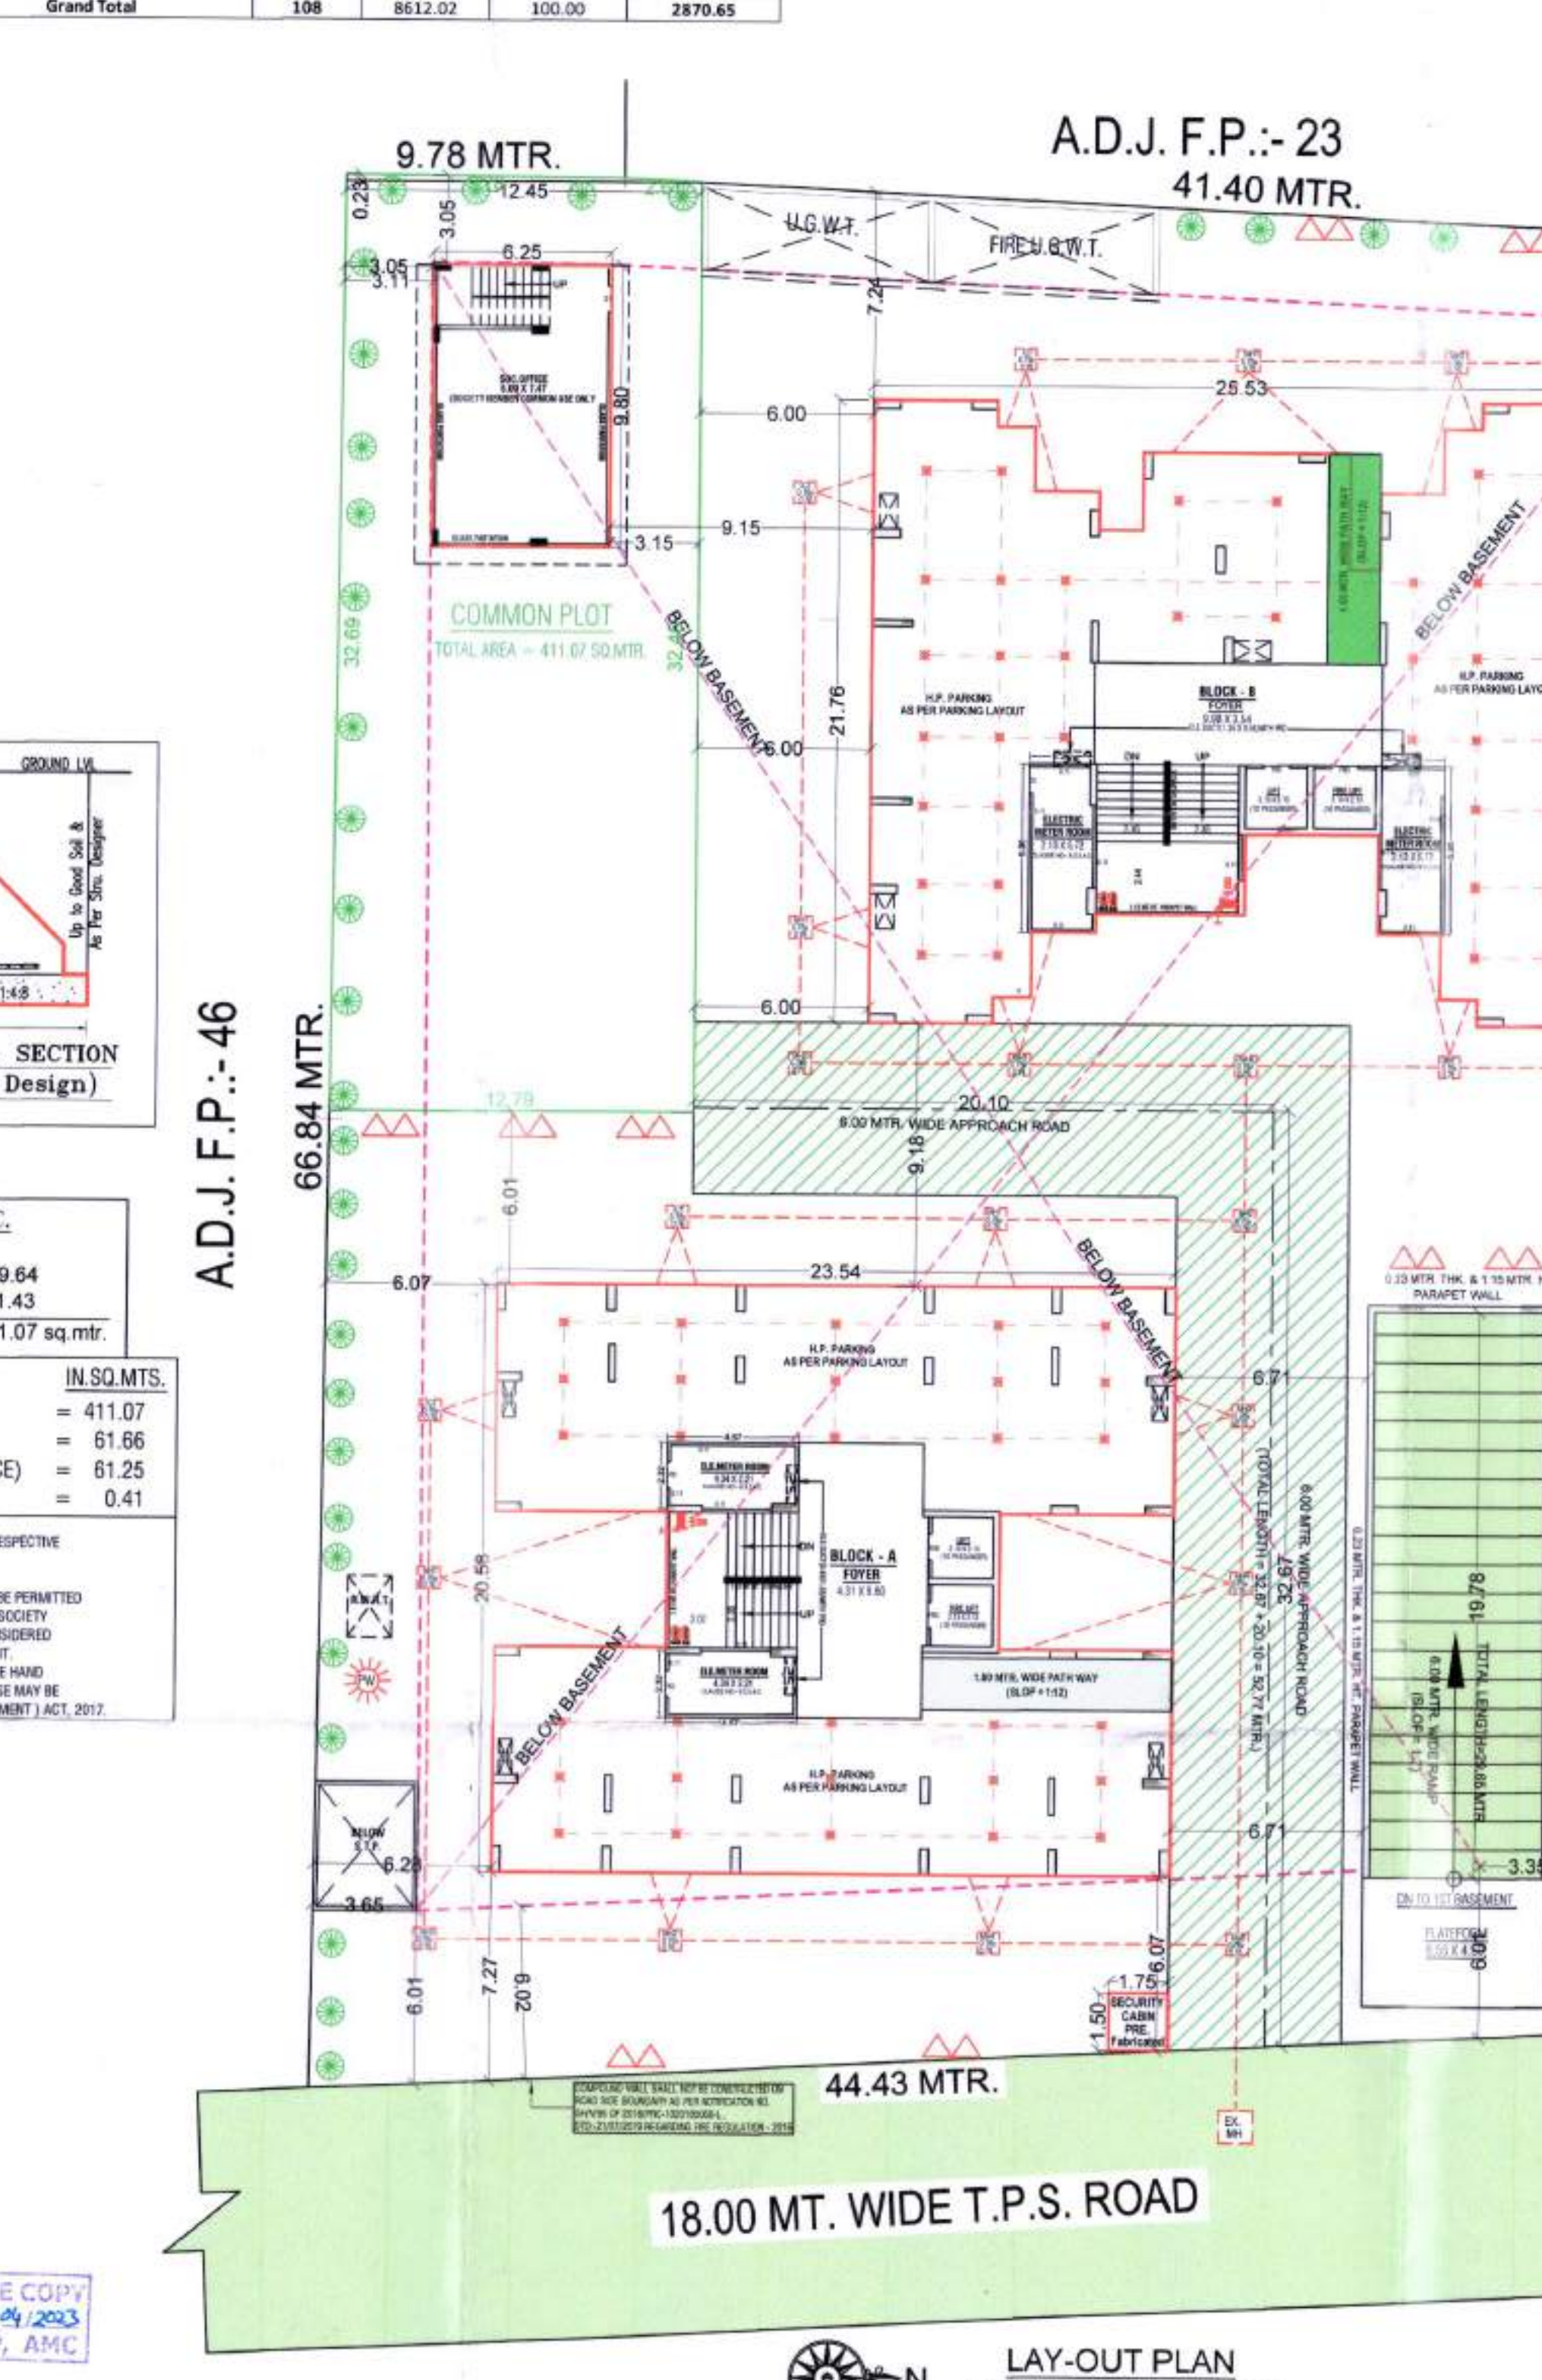

TREE PLANTATION

PLOT AREA = 3240.00 sq.mtr.
REQ. = 200 SOM. PLOT AREA = 5 TREE
3240.00 / 200 X 5 = 81 TREE REQ.
SAY 81 NOS.
PROVIDED 90 NO. TREE

PERCOLATING WELL CAL.

PLOT AREA F.P. NO-24+26 = 3240.00 sq.mtr.
REQ. = 1500 TO 4000 SQ. MTS. = 1 WELL
3240.00 / 4000 = 0.81
0.81 SAY 1 NOS OF PERCOLATING WELL
PROVIDED = 1 NOS OF PERCOLATING WELL

CONTAINER BIN CALCULATION(RESI.)

TOTAL NOS OF UNIT = 108 NOS
RESI. 1 UNIT 10 LIT. REQ. 1 CONTAINER
TOTAL UNIT 108 X 10 LIT. = 1080 LIT.
1 CONT (80 LTRS CAP) = 1080 / 80 LIT. = 13.50
= 13.50 NOS SAY 14 CONTAINER REQUIRED
TOTAL REQ. 14 NOS RESI.
TOTAL PROVIDED = 15 NOS.

OTHER F.S.I. AREA TABLE

BLOCK	R.C.C. BEAM	SECURITY CABIN	TOTAL
A	14.25	02.63	16.88
B	12.88	00.00	12.88

BUILT UP AREA TABLE

FLOOR	BLOCK-A	BLOCK-B	TOTAL
BASEMENT	2358.78	---	2358.78
GR. FLOOR	427.69	446.27	873.96
1st. FLOOR	427.69	446.27	873.96
2nd. FLOOR	427.69	446.27	873.96
3rd. FLOOR	427.69	446.27	873.96
4th. FLOOR	427.69	446.27	873.96
5th. FLOOR	427.69	446.27	873.96
6th. FLOOR	427.69	446.27	873.96
7th. FLOOR	427.69	446.27	873.96
8th. FLOOR	427.69	446.27	873.96
9th. FLOOR	427.69	446.27	873.96
10th. FLOOR	427.69	446.27	873.96
11th. FLOOR	427.69	446.27	873.96
12th. FLOOR	427.69	446.27	873.96
13th. FLOOR	250.42	---	250.42
STAIR CABIN	061.17	092.85	154.02
O.H.W.T. + L.M.R.	048.45	71.31	119.76
SECURITY CABIN	02.63	---	02.63
ELE. SUB STATION	24.00	---	24.00
SOC.OFFICE (GR + FF)	122.50	---	122.50
TOTAL	8427.92	5819.32	14247.24

F.S.I. & FLOOR AREA TABLE

FLOOR	BLOCK-A	BLOCK-B	TOTAL
GR. FLOOR (S.C.)	002.63	---	002.63
1st. FLOOR	357.80	356.91	714.71
2nd. FLOOR	357.80	356.91	714.71
3rd. FLOOR	357.80	356.91	714.71
4th. FLOOR	357.80	356.91	714.71
5th. FLOOR	357.80	356.91	714.71
6th. FLOOR	357.80	356.91	714.71
7th. FLOOR	357.80	356.91	714.71
8th. FLOOR	357.80	356.91	714.71
9th. FLOOR	357.80	356.91	714.71
10th. FLOOR	357.80	356.91	714.71
11th. FLOOR	357.80	356.91	714.71
12th. FLOOR	357.80	356.91	714.71
13th. FLOOR	179.15	---	179.15
TOTAL	4475.38	4136.64	8612.02

USE / UNIT TABLE

FLOOR	BLOCK-A	BLOCK-B	USE	TOTAL
GR. FLOOR (HP)	---	---	PARKING	---
1st. FLOOR	04	05	RESI.	09
2nd. FLOOR	04	05	RESI.	09
3rd. FLOOR	04	05	RESI.	09
4th. FLOOR	04	05	RESI.	09
5th. FLOOR	04	05	RESI.	09
6th. FLOOR	04	05	RESI.	09
7th. FLOOR	04	05	RESI.	09
8th. FLOOR	04	05	RESI.	09
9th. FLOOR	04	05	RESI.	09
10th. FLOOR	04	05	RESI.	09
11th. FLOOR	04	05	RESI.	09
12th. FLOOR	04	03	RESI.	07
13th. FLOOR	02	---	RESI.	02
TOTAL	50	58	RESI.	108

RESIDENTIAL AFFORDABLE HOUSING PROJECT(RAH)

LAY-OUT PLAN	SHEET NO = 1/3
PLAN SHOWING PROPOSE RESIDENTIAL(RESIDENTIAL AFFORDABLE HOUSING) BUILDING ON AMALGAMATED F.P.NO-24 + 26 OF T.P.S.NO- 93/C (GYASPUR - VEJALPURI) (DRAFT SANCTIONED)(R.S.NO-247/B/21,247/B/22,247/B/4/1,247/B/4/2), (O.P.NO-24/1,24/2,26/1,26/2),MOJE:-GYASPUR,TALUKA:-VATVA, DIST.-AHMEDABAD.	
ZONE:- R1	USE:- RESIDENCE(RAH)(DW-3)
SCALE :- 1 CM=2 MT	BLOCK :- B
AREA TABLE	SQ. MTS.
PLOT AREA	3240.00
NOT IN POSSESSION	50.35
NET PLOT AREA FOR DEVELOPMENT	3189.65
REQ. COMMON PLOT AREA @ 10% OF (3240.00)	324.00
PROVIDED COMMON PLOT AREA	411.07
PERMI. BASE F.S.I. AREA (1.18 (3189.65 X 1.8)	5741.37
PERMI. CHARGEABLE F.S.I. @ 0.9 (3189.65 X 0.9)	2870.69
TOTAL PERM. F.S.I. @ 2.7 (3189.65 X 2.7)	8612.06
TOTAL UTILIZED F.S.I. AREA	8612.02
UTILIZED CHARGEABLE FSI USE (8612.02 - 5741.37)	2870.65
BALANCE F.S.I. AREA (8612.06 - 8612.02)	00.04

COLOR NOTE

- PLOT BOUNDARY
- PROPOSED WORK
- ROAD
- DRAINAGE
- PERCOLATION WELL
- COMMUNITY BIN
- TREE
- NOT IN POSSESSION

1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12. 13. 14. 15. 16. 17. 18. 19. 20. 21. 22. 23. 24. 25. 26. 27. 28. 29. 30. 31. 32. 33. 34. 35. 36. 37. 38. 39. 40. 41. 42. 43. 44. 45. 46. 47. 48. 49. 50. 51. 52. 53. 54. 55. 56. 57. 58. 59. 60. 61. 62. 63. 64. 65. 66. 67. 68. 69. 70. 71. 72. 73. 74. 75. 76. 77. 78. 79. 80. 81. 82. 83. 84. 85. 86. 87. 88. 89. 90. 91. 92. 93. 94. 95. 96. 97. 98. 99. 100. 101. 102. 103. 104. 105. 106. 107. 108. 109. 110. 111. 112. 113. 114. 115. 116. 117. 118. 119. 120. 121. 122. 123. 124. 125. 126. 127. 128. 129. 130. 131. 132. 133. 134. 135. 136. 137. 138. 139. 140. 141. 142. 143. 144. 145. 146. 147. 148. 149. 150. 151. 152. 153. 154. 155. 156. 157. 158. 159. 160. 161. 162. 163. 164. 165. 166. 167. 168. 169. 170. 171. 172. 173. 174. 175. 176. 177. 178. 179. 180. 181. 182. 183. 184. 185. 186. 187. 188. 189. 190. 191. 192. 193. 194. 195. 196. 197. 198. 199. 200. 201. 202. 203. 204. 205. 206. 207. 208. 209. 210. 211. 212. 213. 214. 215. 216. 217. 218. 219. 220. 221. 222. 223. 224. 225. 226. 227. 228. 229. 230. 231. 232. 233. 234. 235. 236. 237. 238. 239. 240. 241. 242. 243. 244. 245. 246. 247. 248. 249. 250. 251. 252. 253. 254. 255. 256. 257. 258. 259. 260. 261. 262. 263. 264. 265. 266. 267. 268. 269. 270. 271. 272. 273. 274. 275. 276. 277. 278. 279. 280. 281. 282. 283. 284. 285. 286. 287. 288. 289. 290. 291. 292. 293. 294. 295. 296. 297. 298. 299. 300. 301. 302. 303. 304. 305. 306. 307. 308. 309. 310. 311. 312. 313. 314. 315. 316. 317. 318. 319. 320. 321. 322. 323. 324. 325. 326. 327. 328. 329. 330. 331. 332. 333. 334. 335. 336. 337. 338. 339. 340. 341. 342. 343. 344. 345. 346. 347. 348. 349. 350. 351. 352. 353. 354. 355. 356. 357. 358. 359. 360. 361. 362. 363. 364. 365. 366. 367. 368. 369. 370. 371. 372. 373. 374. 375. 376. 377. 378. 379. 380. 381. 382. 383. 384. 385. 386. 387. 388. 389. 390. 391. 392. 393. 394. 395. 396. 397. 398. 399. 400. 401. 402. 403. 404. 405. 406. 407. 408. 409. 410. 411. 412. 413. 414. 415. 416. 417. 418. 419. 420. 421. 422. 423. 424. 425. 426. 427. 428. 429. 430. 431. 432. 433. 434. 435. 436. 437. 438. 439. 440. 441. 442. 443. 444. 445. 446. 447. 448. 449. 450. 451. 452. 453. 454. 455. 456. 457. 458. 459. 460. 461. 462. 463. 464. 465. 466. 467. 468. 469. 470. 471. 472. 473. 474. 475. 476. 477. 478. 479. 480. 481. 482. 483. 484. 485. 486. 487. 488. 489. 490. 491. 492. 493. 494. 495. 496. 497. 498. 499. 500. 501. 502. 503. 504. 505. 506. 507. 5



| | |
|---|-------------------------------------|
| AREA STATEMENT (Ahmedabad Municipal Corporation (AMC)) | VERSION NO.: 1.0.56 |
| PROJECT DETAIL : | VERSION DATE: 07/03/2023 |
| Authority: Ahmedabad Municipal Corporation (AMC) | Plot Use: Residential |
| AuthorityClass: D1 | Plot SubUse: Detached Dwelling Unit |
| AuthorityGrade: Municipal Corporation | Plot Use Group: Dwelling-1 (DW1) |
| Project Type: Amalgamation | Plot Category: NA |
| Nature of Development: NEW | Land Use Zone: Residential Zone I |
| Development Area: Draft/Preliminary Town Planning Scheme | Conceptualized Use Zone: R1 |
| SubDevelopment Area: Other Areas | |
| Special Project: NA | |
| Special Road: NA | |
| Site Address: F.P.NO:-24,26,OPP-NOOR RESIDENCY GYASPUR,AHMEDABAD. | |
| AREA DETAILS : | |
| 1. Area of Plot As per record | Sq.Mts. |
| Plot Validation Certificate | 3240.00 |
| Physical area measured at site | 3240.00 |
| 7/12 or Document | 3240.00 |
| Plot area drawn as per Site | 3240.07 |
| Area of Plot Considered | 3240.00 |
| 2. Deduction for | |
| (a)Proposed roads | 0.00 |
| (b)Any reservations | 50.35 |
| Area not in Proposal | 50.35 |
| Total(a + b) | 50.35 |
| 3. Net Area of plot (1 - 2) | 3189.65 |
| Common Plot (Regd.) | 318.96 |
| 4. Common Plot (Prop) | 419.46 |
| Area not in Proposal | 50.35 |
| Common Plot | 419.46 |
| Balance area of Plot(3 - 4) | 2770.19 |
| Notes : | |

Color Notes

COLOR INDEX

| | |
|--|--|
| PLOT LINES | |
| EXISTING STREET | |
| FUTURE STREET, IF ANY | |
| PERMISSIBLE BUILDING LINE | |
| OPEN SPACES | |
| EXISTING WORKS | |
| WORK PROPOSED TO BE DEMOLISHED | |
| PROPOSED WORK | |
| DRAINAGE AND SEWERAGE WORK | |
| WATER SUPPLY WORK | |
| WORK WITHOUT PERMISSION IF STARTED ON SITE | |
| APPROVED WORK | |

Plot Details Before Amalgamation(Table A1)

| Plot(s) | Minimum Plot Area Consider | Area not in Proposal | Net Plot Area |
|---|----------------------------|----------------------|---------------|
| FINAL PLOT NO.- 24
AREA = 1620.00 SQ.MT. | 1619.96 | 50.35 | 1569.63 |
| FINAL PLOT NO.- 26
AREA = 1620.00 SQ.MT. | 1620.09 | 0.00 | 1620.09 |
| Grand Total | 3240.07 | 50.35 | 3189.72 |

Tree Details (Table 3h)

| Plot | Name | Nos Of Trees | |
|---|------|--------------|------|
| | | Reqd | Prop |
| F.P. NO. - 24 + F.P. NO.- 26
TOTAL AREA = 3240.00
SQ.MTR. | Tree | - | 81 |

Plot Details After Amalgamation (Table A2-a)

| Plot(s) | Amalgamated Plot Area | | AML Plot Area
(Considered
Min) | Deviation Area
Considered
(m2) | Deductions
(m2) | Net Developable
Area (m2) |
|--|--------------------------|---------|--------------------------------------|--------------------------------------|-------------------------|------------------------------|
| | Calculated from
Plots | Drawing | | | Area not in
Proposal | |
| F.P. NO.- 24 +
F.P. NO.- 26
TOTAL AREA =
3240.00
SQ.MTR. | 3240.00 | 3240.07 | 3240.00 | 3240.00 | 50.35 | 3189.65 |
| Grand Total | 3240.00 | 3240.07 | 3240.00 | 3240.00 | 50.35 | 3189.65 |

NOTES RELATED TO C.G.D.C.R.-2017

- NOTES :-
- IT IS CERTIFIED THAT PLOT UNDER REFERENCE IS SURVEYED BY ME AND THE DIMENSIONS OF ALL SIDES OF PLOT AND PLOT AREA AS SHOWN IN PLAN ARE MEASURED BY ENGINEER ON RECORD AND IN ACCORDANCE WITH OWNERSHIP / REVENUE RECORD.
 - ENGINEER IS FULLY RESPONSIBLE FOR LEAVING OPEN SPACE AND MARGIN.
 - IT IS CERTIFY THAT ACCORDING TO CGDCR 2017, ALL REQUIREMENTS OF THE BUILDING ARE CHECKED AND NECESSARY ACTIONS ARE TAKEN.
 - TREE PLANTATION IS PROVIDED AS PER THE CLAUSE NO.17.4 OF CGDCR 2017.
 - POLLUTION CONTROL SYSTEM IS PROVIDED AS PER THE CHAPTER NO. 18 OF CGDCR 2017.

OWNER'S NAME AND SIGNATURE

ABDULSALAM SIRAJUDDIN MANSURI & OTHERS

ARCHENG'S NAME & SIGNATURE

VED SNEHAL KHTAVBHAI

001ERL05072610314




SUPERVISOR'S NAME & SIGNATURE

DATE OF APPROVAL

16/03/2023

DESIGNATION OF APPROVER :

Assistant Town Development Officer

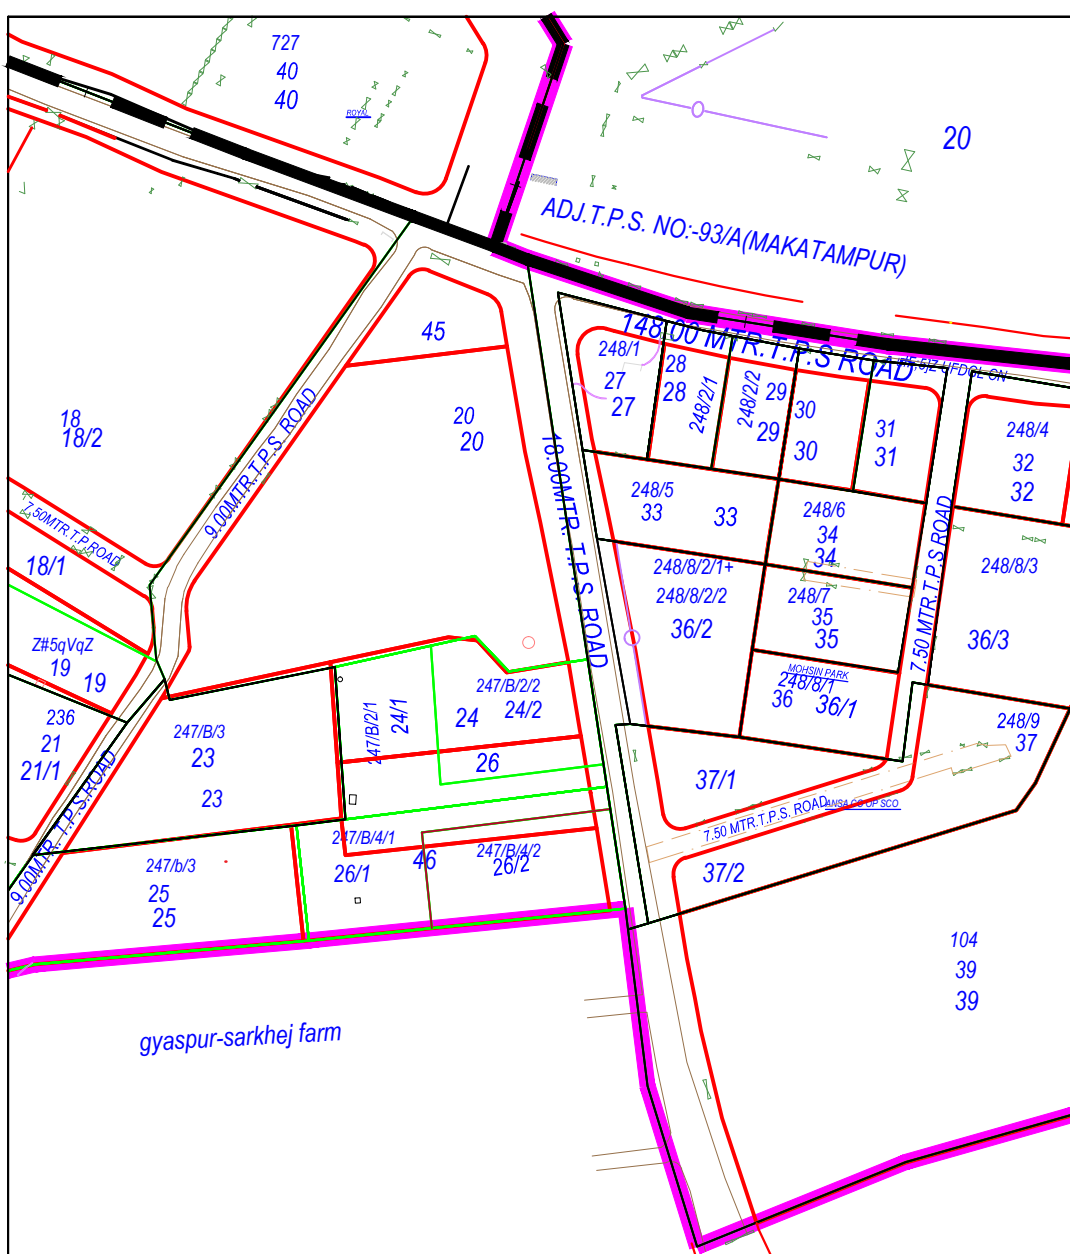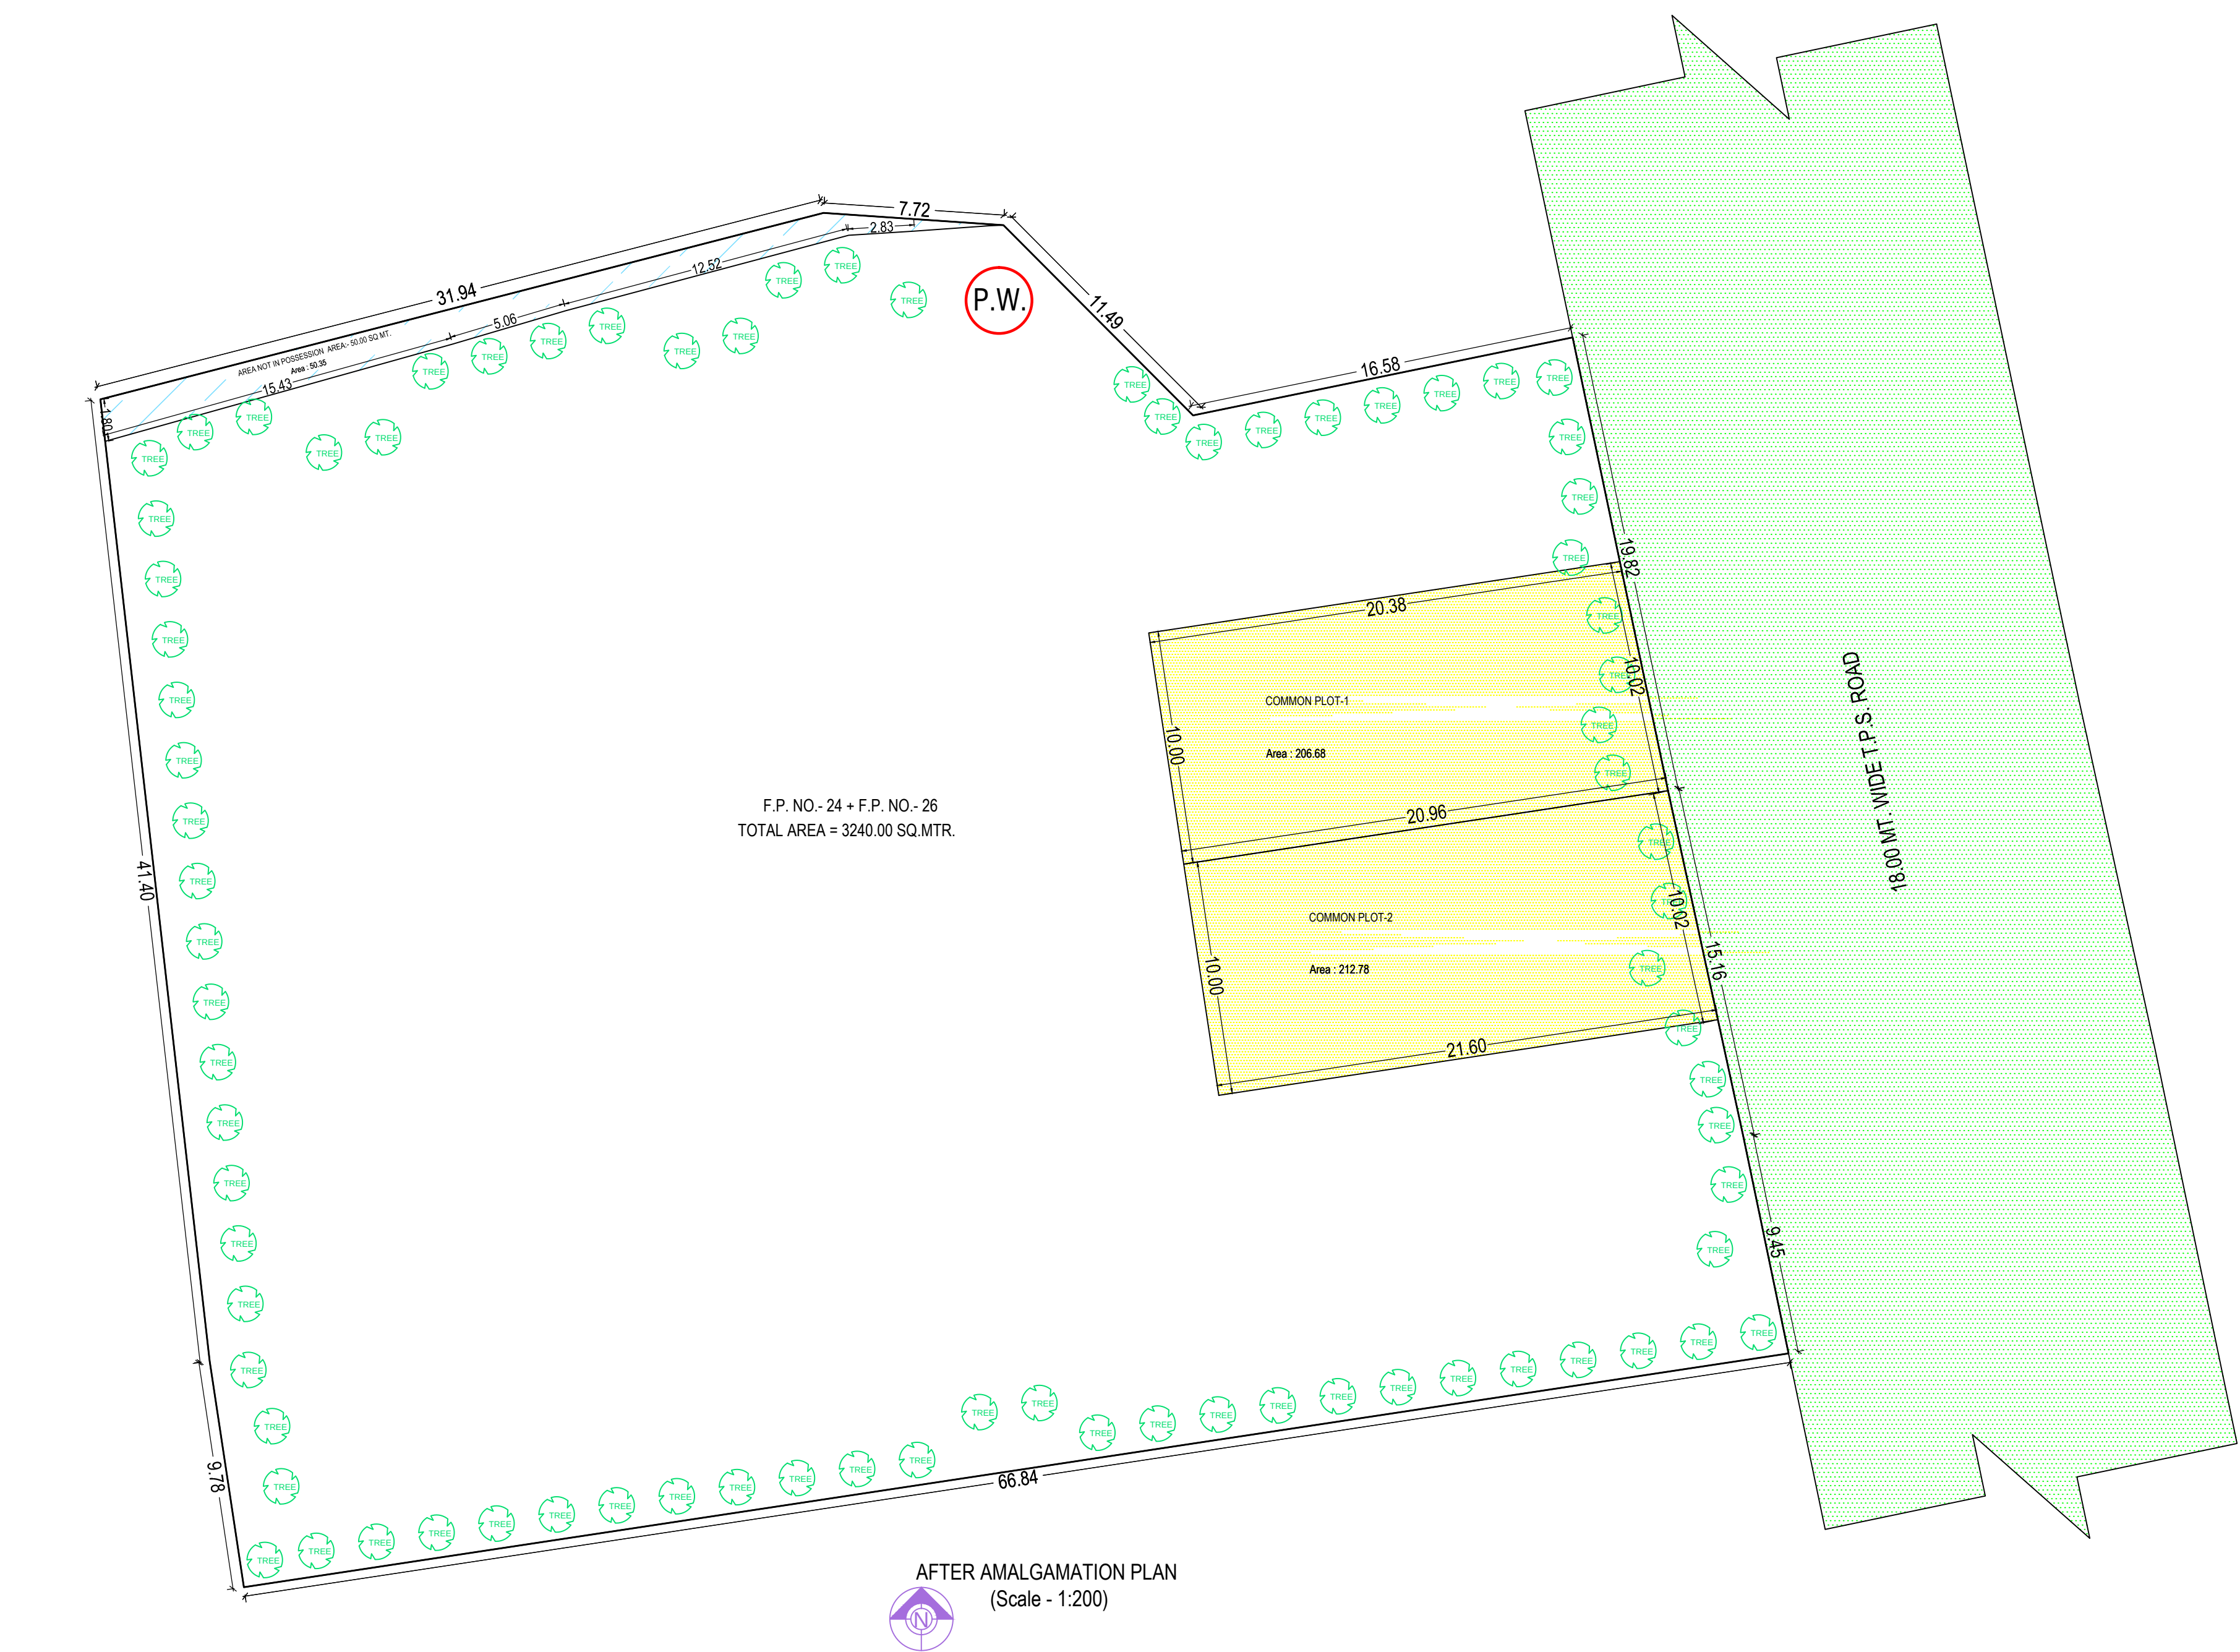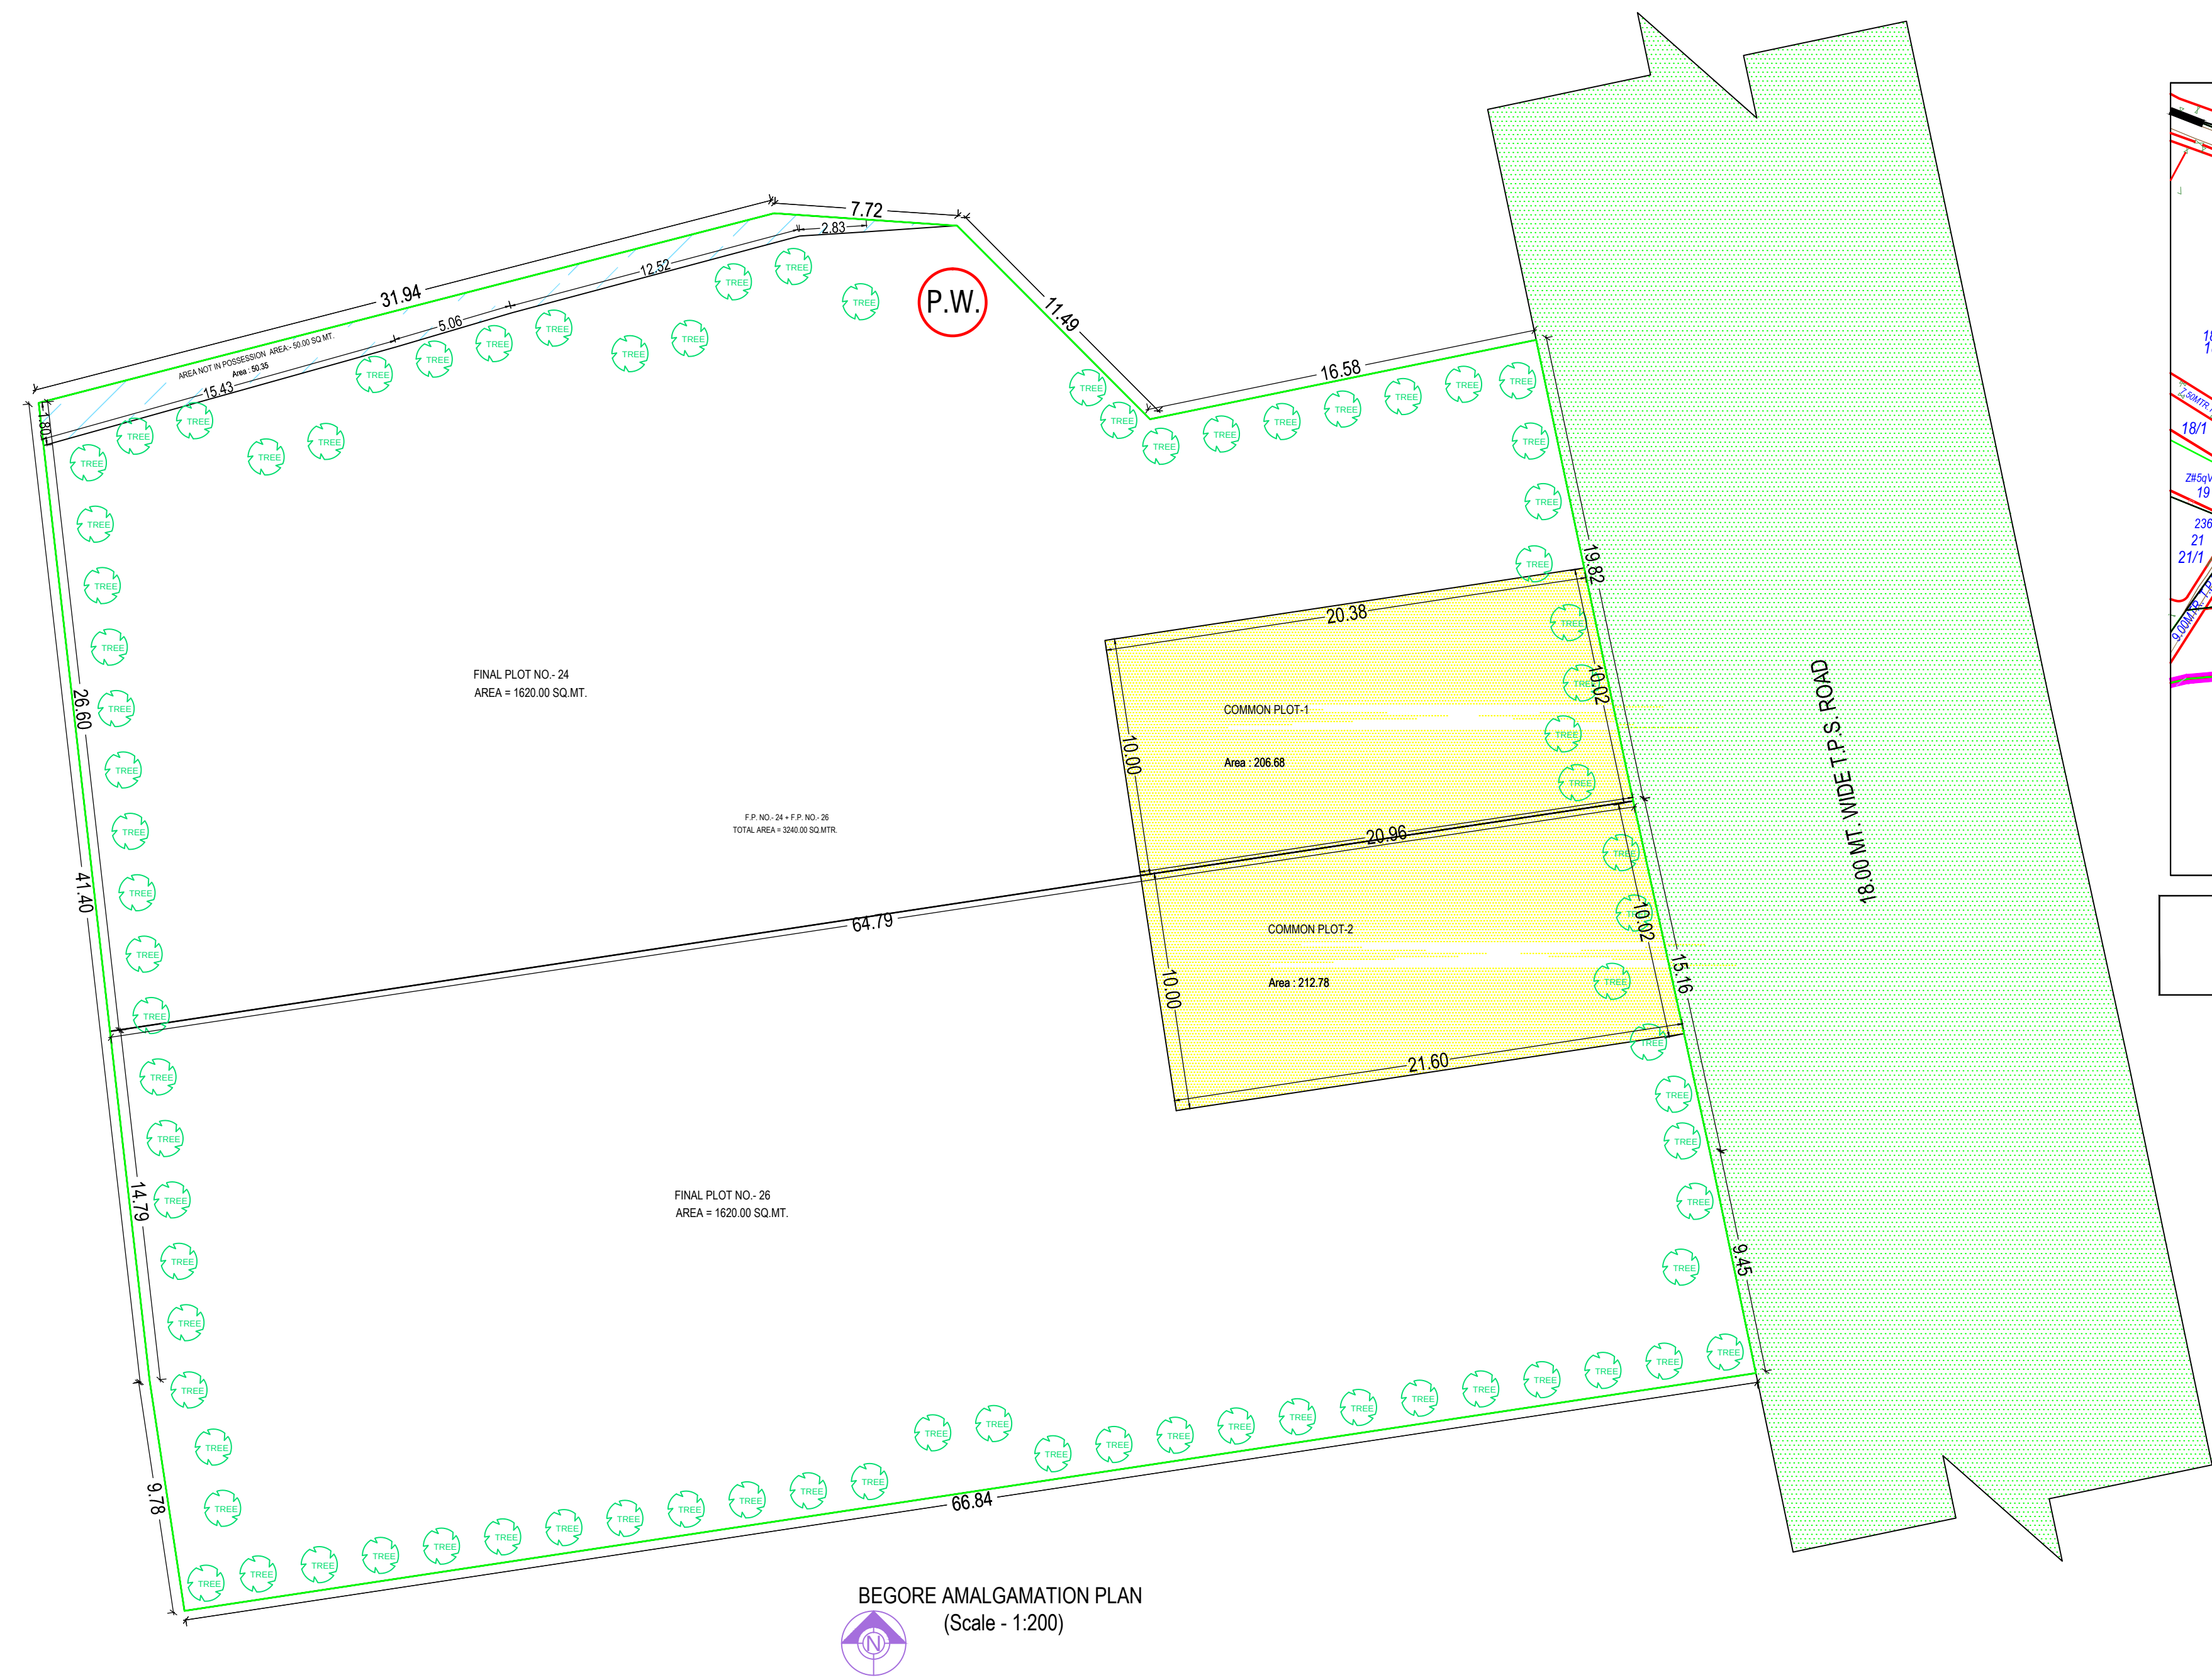


PLOT AREA AS PER TPO OPINION-F.P.NO:-26

LETTER NO.-: T.P.S. NO.- 93/C(GYASPUR-VEJALPUR)/F.P.NO:-26/3247

REF.CASE NO.-: CPD/AMC/OP-361 DATE:- 14/12/2022

| DISTRICT | TALUKA | MOJE | | | |
|-----------------|------------------------|---------|--------------------|---------|----------------------|
| AHMEDABAD | VEJALPUR | GYASPUR | | | |
| REVENUE SUR NO. | SUR NO. AREA IN SQ.MTR | OP NO | OP AREA IN SQ.MTR. | F.P. NO | F.P. AREA IN SQ.MTR. |
| 247/B/4/1 | 1350.00 | 25/1 | | | |
| 247/B/4/2 | 1350.00 | 25/2 | 2700.00 | 26 | 1620.00 |
| | 2700.00 | | | | |

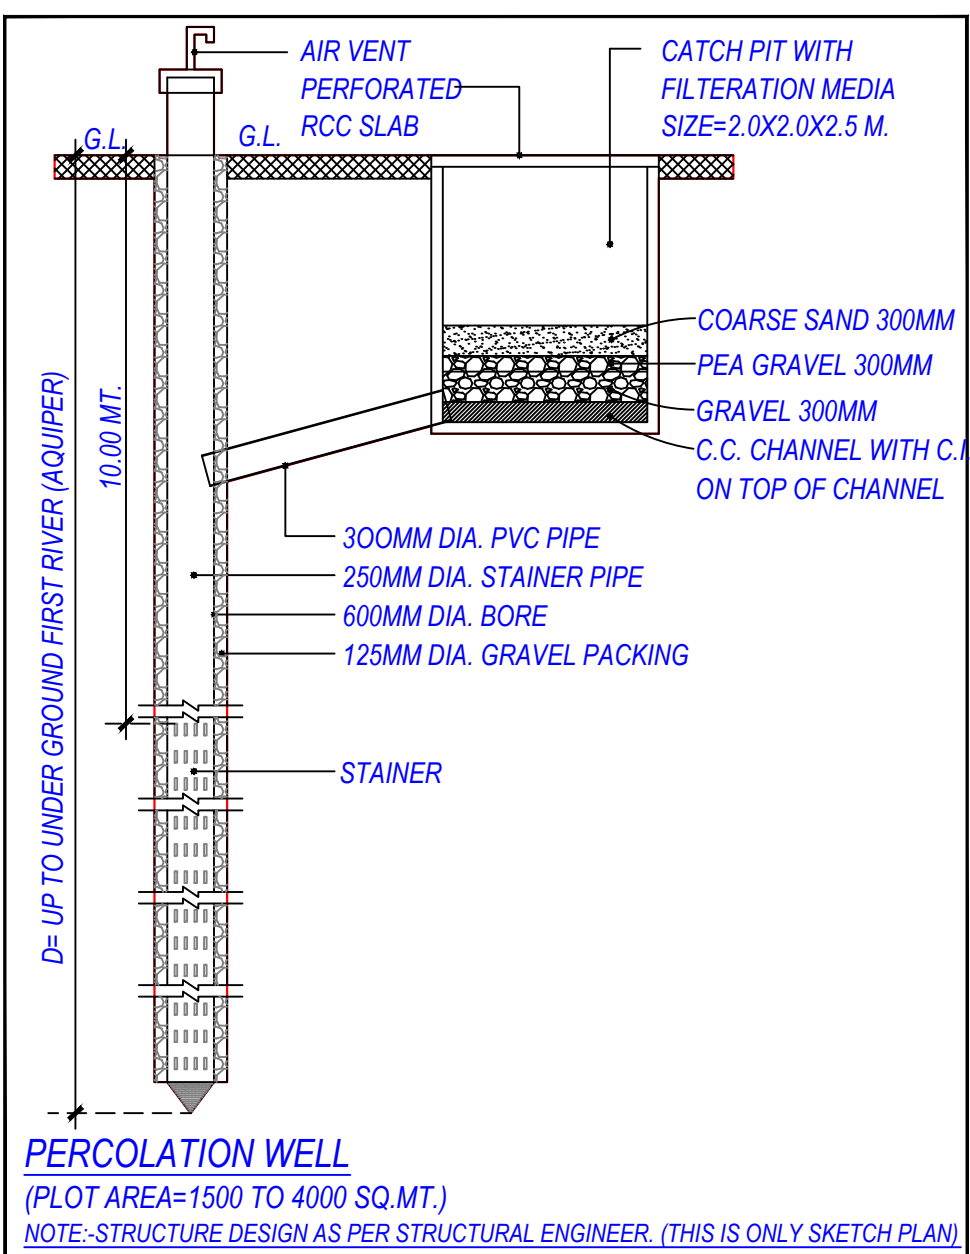

PLOT AREA AS PER TPO OPINION-F.P.NO:-24

LETTER NO.-: T.P.S. NO.- 93/C(GYASPUR-VEJALPUR)/F.P.NO:-24/3248

REF.CASE NO.-: CPD/AMC/OP-562 DATE:- 14/12/2022

| DISTRICT | TALUKA | MOJE |
|-----------|----------|---------|
| AHMEDABAD | VEJALPUR | GYASPUR |

| REVENUE SUR. NO. | SUR NO. AREA IN SQ.MTR. | OP NO | OP AREA IN SQ.MTR. | F.P. NO | F.P. AREA IN SQ.MTR. |
|------------------|-------------------------|-------|--------------------|---------|----------------------|
| 247/B/2/1 | 1350.00 | 24/1 | | | |
| 247/B/2/2 | 1350.00 | 24/2 | 2700.00 | 24 | 1620.00 |
| | 2700.00 | | | | |

PLOT AREA F.P. NO:- 24+26 = 3240.00 sq.mtr.

REQ. = 200 SQM. PLOT AREA = 5 TREE

3240.00/1200 X 5 = 81 TREE REQ.

SAY 81 NOS.

PROVIDED 81 NO. TREE

PLOT AREA F.P. NO:- 24+26 = 3240.00 sq.mtr.

REQ. = 1500 TO 4000 SQ. MTS. = 1 WELL

3240.00/14000 = 0.81

0.81 SAY 1 NOS OF PERCOLATING WELL

PROVIDED = 1 NOS OF PERCOLATING WELL

BEFORE AMALGAMETION LAYOUT OF F.P. NO:- 24 & F.P. NO:- 26

AAYAT DEVELOPERS

PROJECT NAME - AAYAT HEIGHTS

PARKING DETAILS OF TP - 93/C (GYASPUR-VEJALPUR) FP - 24+26

| OPEN PARKING (RESI) | | | | | | |
|------------------------|-----------|-------------|-----------|--------------|---------------|-------------------|
| FLOOR | 2 WHEELER | AREA(SQ.MT) | 4 WHEELER | AREA (SQ.MT) | TOTAL WHEELER | TOTAL AREA(SQ.MT) |
| G.FLOOR | 0 | 0 | 0 | 0 | 0 | 0 |
| 1ST BASEMENT | 0 | 0 | 0 | 0 | 0 | 0 |
| TOTAL | 0 | 0 | 0 | 0 | 0 | 0 |
| COVERED PARKING (RESI) | | | | | | |
| FLOOR | 2 WHEELER | AREA(SQ.MT) | 4 WHEELER | AREA (SQ.MT) | TOTAL WHEELER | TOTAL AREA(SQ.MT) |
| G.FLOOR | 97 | 353.31 | 17 | 423.66 | 114 | 776.97 |
| 1ST BASEMENT | 75 | 576.11 | 38 | 1401.66 | 113 | 1977.77 |
| TOTAL | 172 | 929.42 | 55 | 1825.32 | 227 | 2754.74 |

| TOTAL PARKING | | | | | | |
|---------------|-----------|-------------|-----------|--------------|---------------|-------------------|
| FLOOR | 2 WHEELER | AREA(SQ.MT) | 4 WHEELER | AREA (SQ.MT) | TOTAL WHEELER | TOTAL AREA(SQ.MT) |
| G.FLOOR | 97 | 353.31 | 17 | 423.66 | 114 | 776.97 |
| 1ST BASEMENT | 75 | 576.11 | 38 | 1401.66 | 113 | 1977.77 |
| TOTAL | 172 | 929.42 | 55 | 1825.32 | 227 | 2754.74 |

| PARTICULAR | CAR | TWO WHEELER | TOTAL | TOTAL PARKING AREA |
|---------------------------|-----|-------------|-------|--------------------|
| NUMBER OF OPEN PARKING | 0 | 0 | 0 | 0 |
| NUMBER OF COVERED PARKING | 55 | 172 | 227 | 2754.74 |
| TOTAL | 55 | 172 | 227 | 2754.74 |

FOR, AAYAT DEVELOPERS

PARTNER

M. Dadali
MOHAMMADALI YUSUFALI MOMIN
GADHA, SABARKANTHA,
HIMATNAGAR - 383010
LIC - 001ERH25032810811
ENGINEER - HIGH RISE